






6 ПОВЕРХ





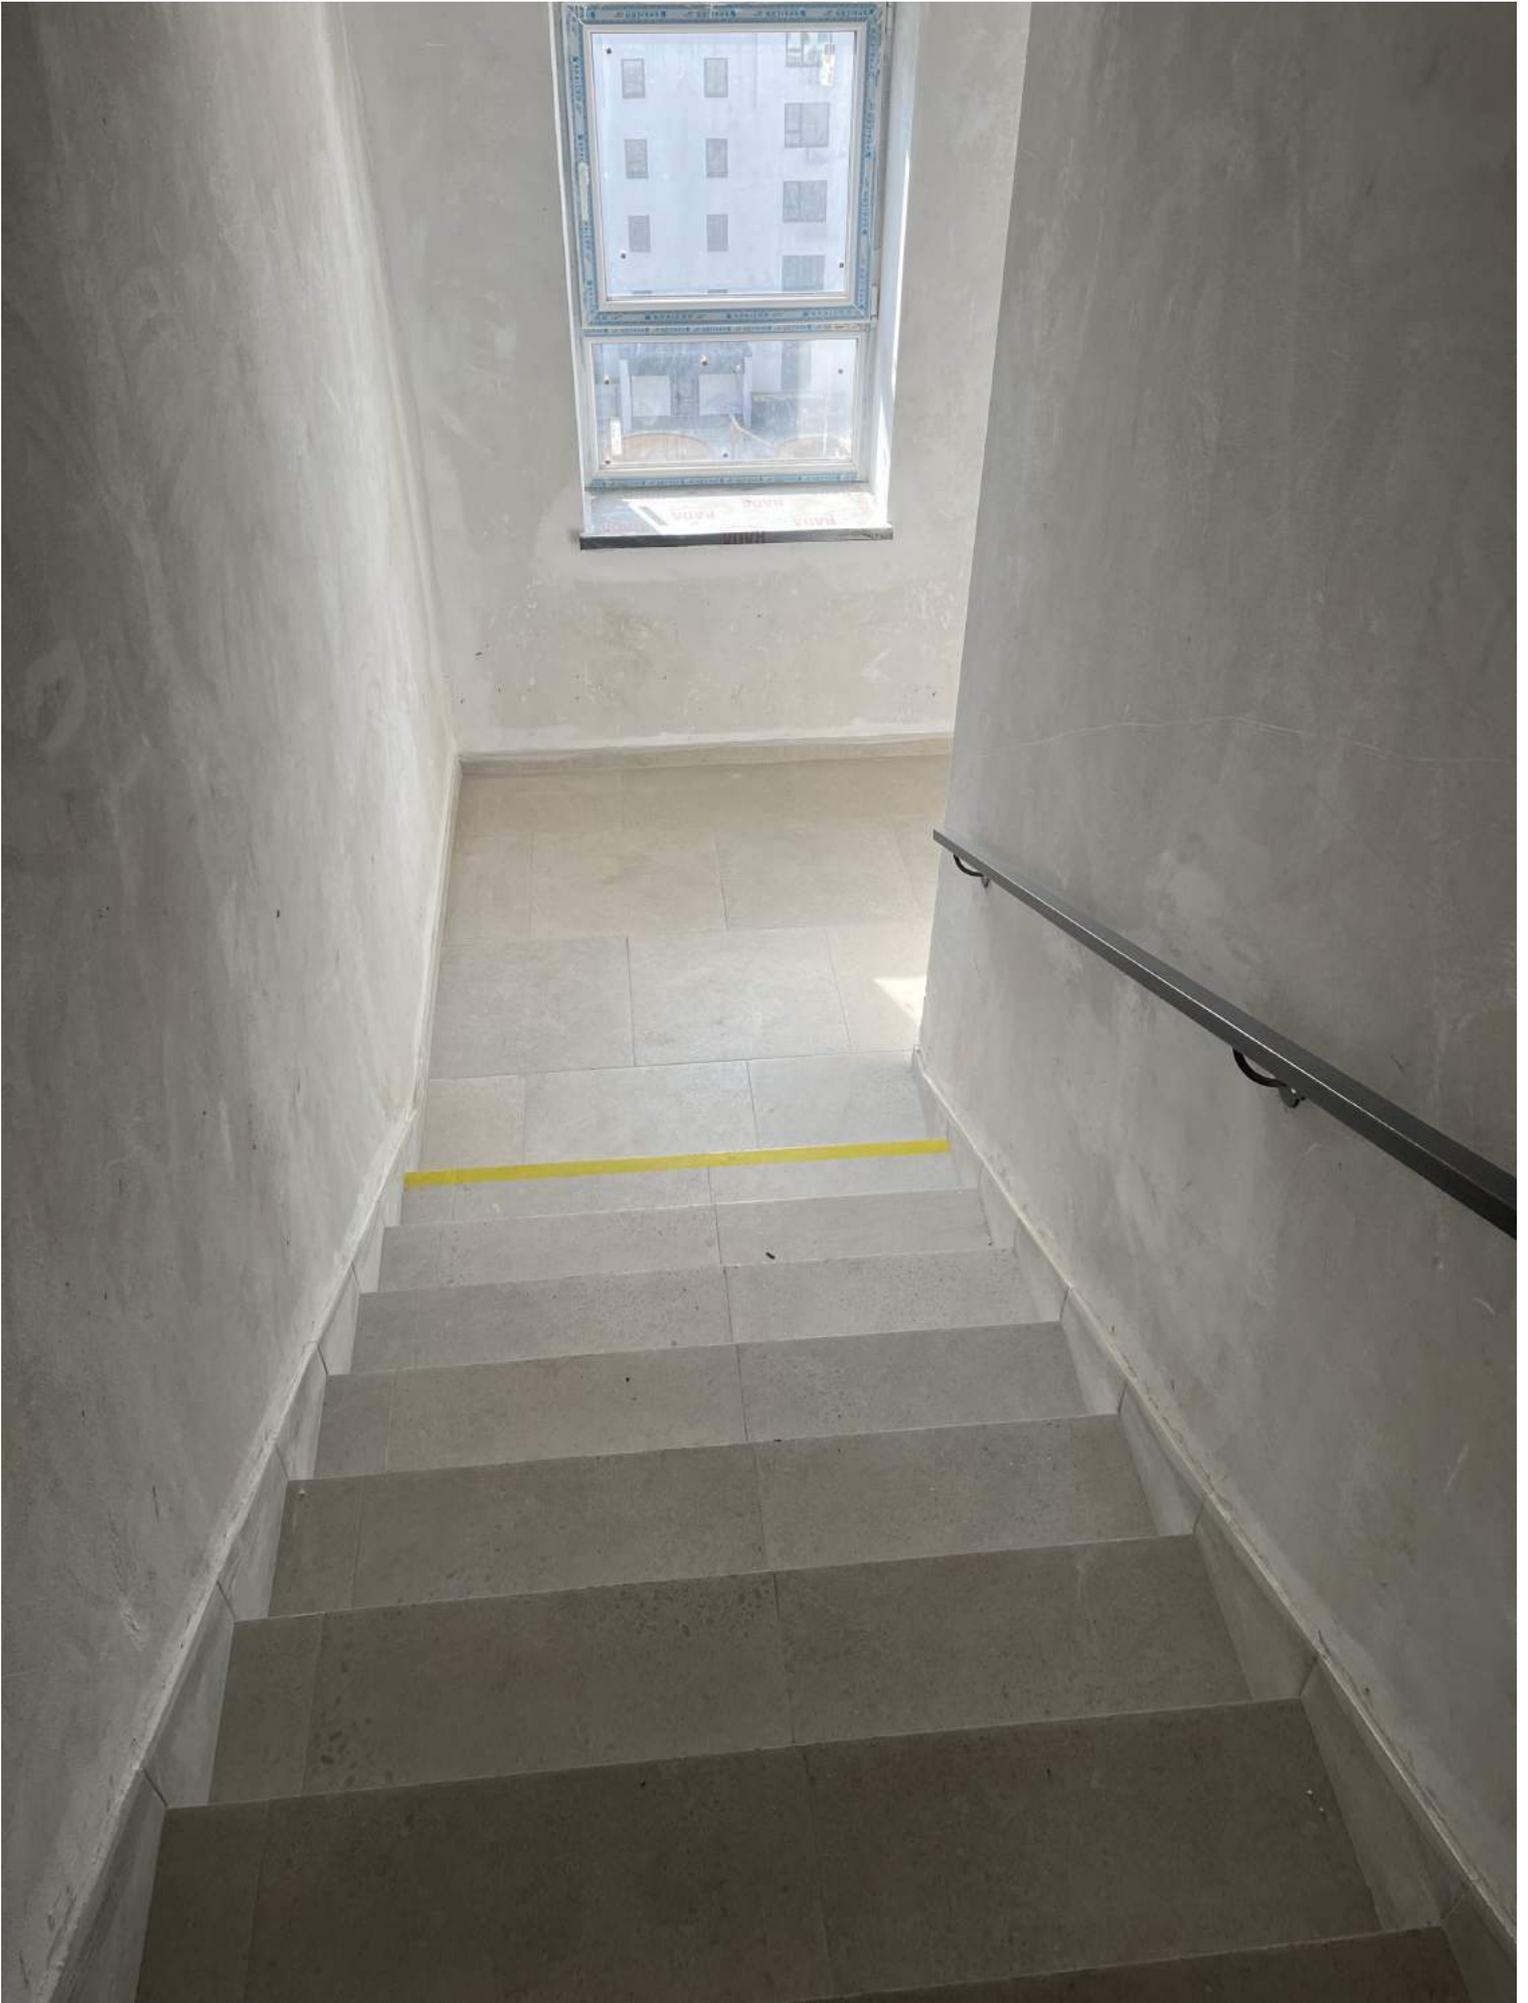











Низ Губ

010119 301

















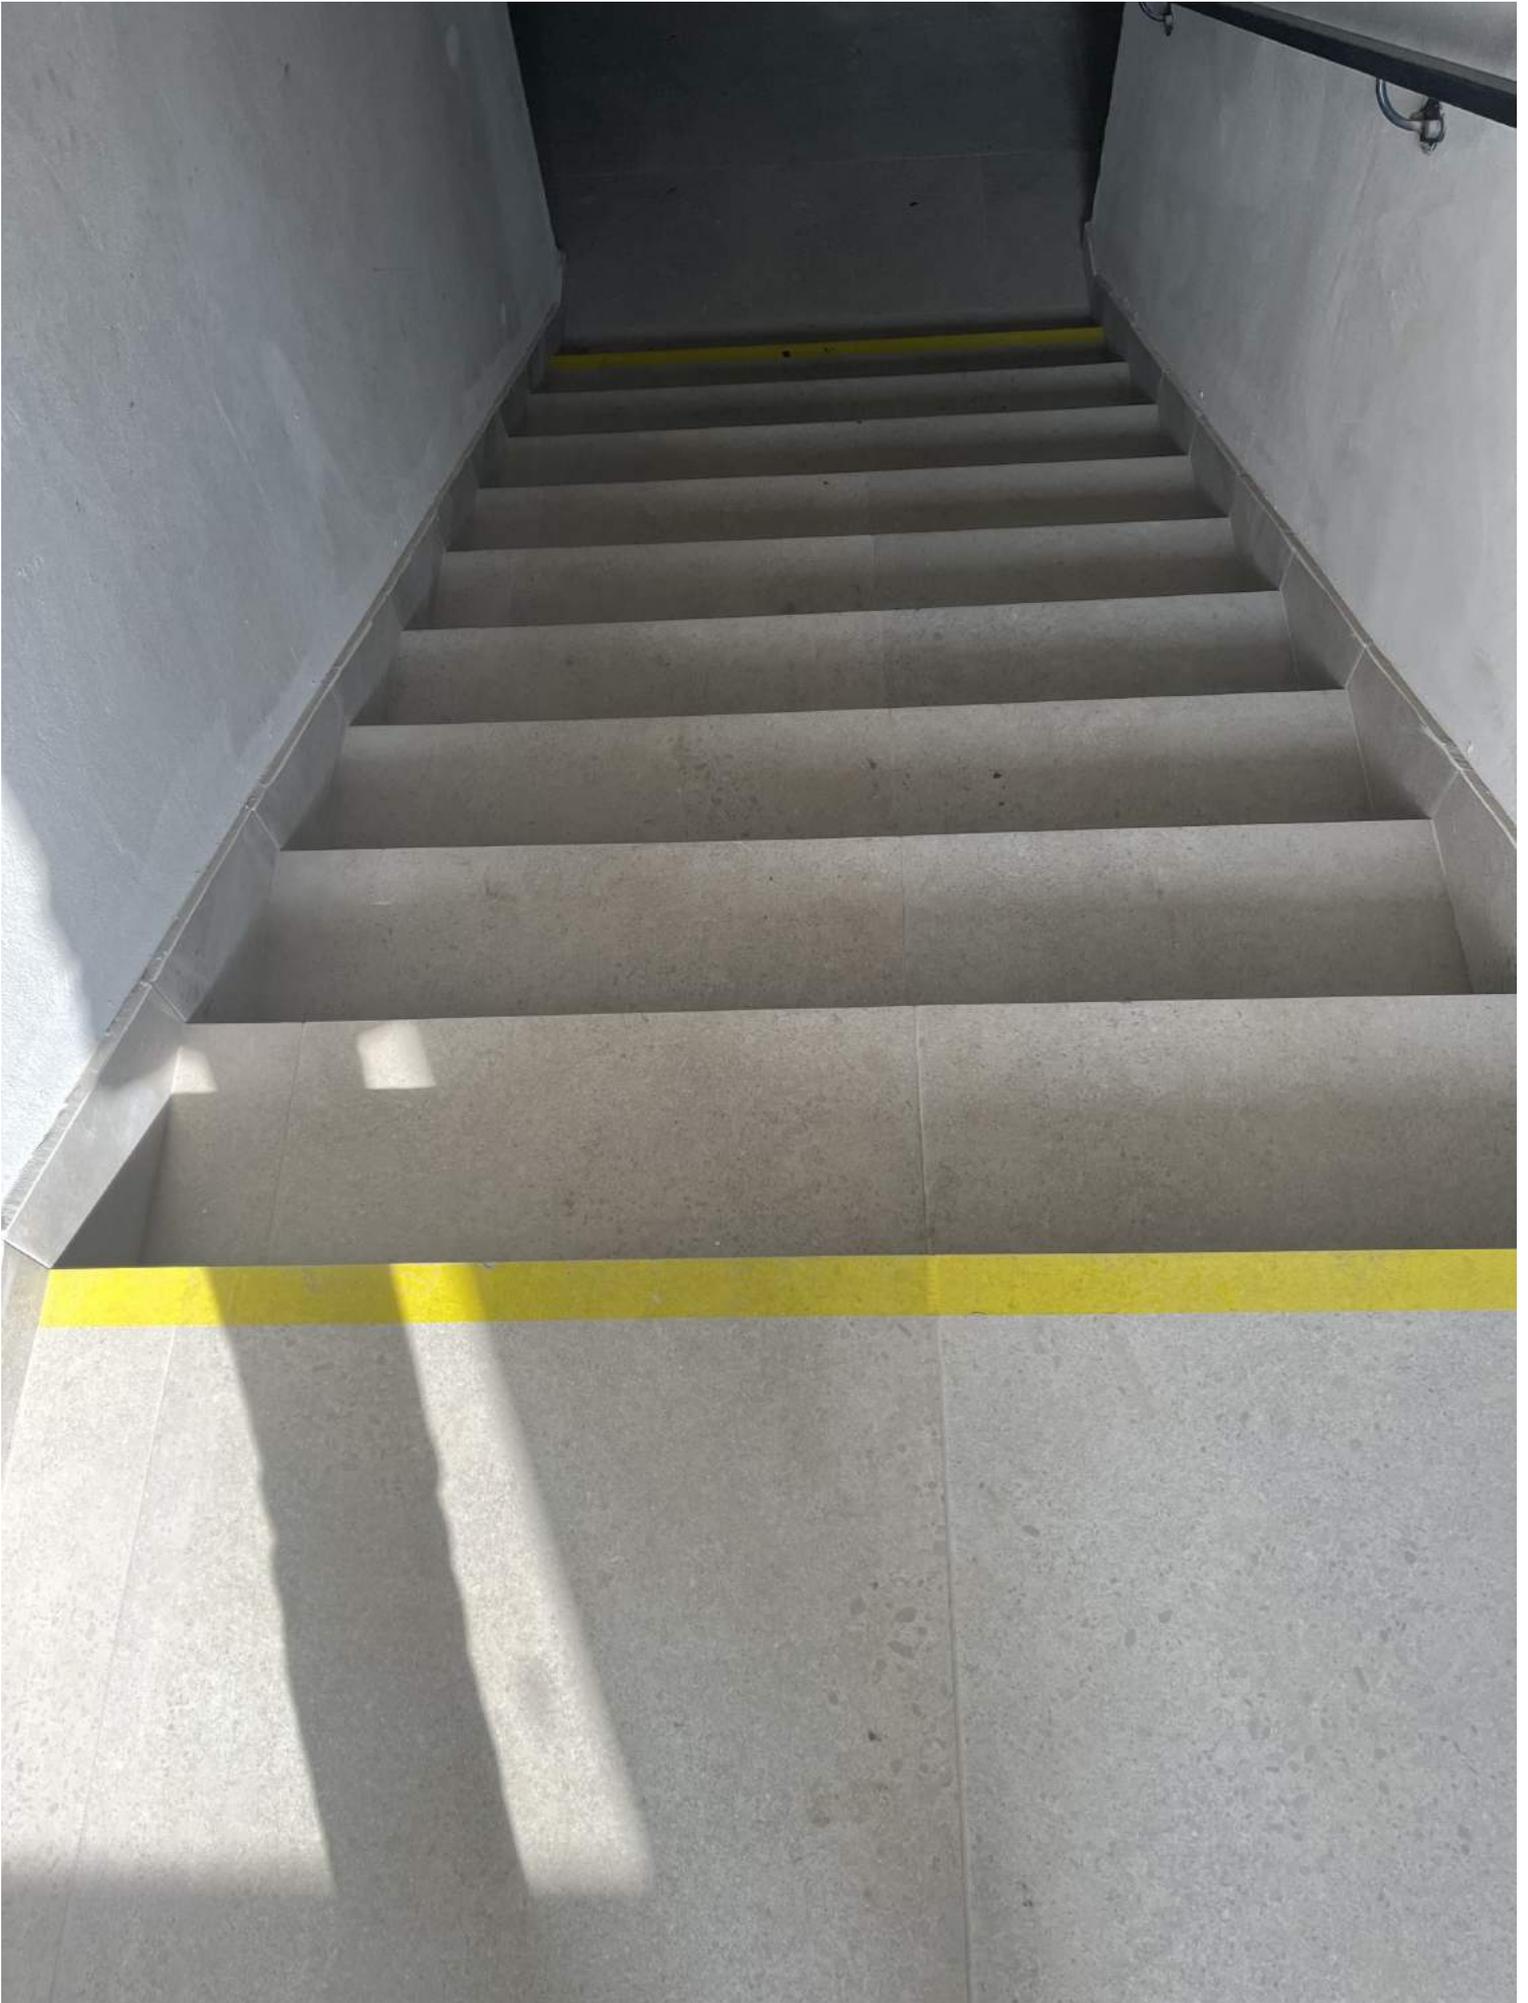







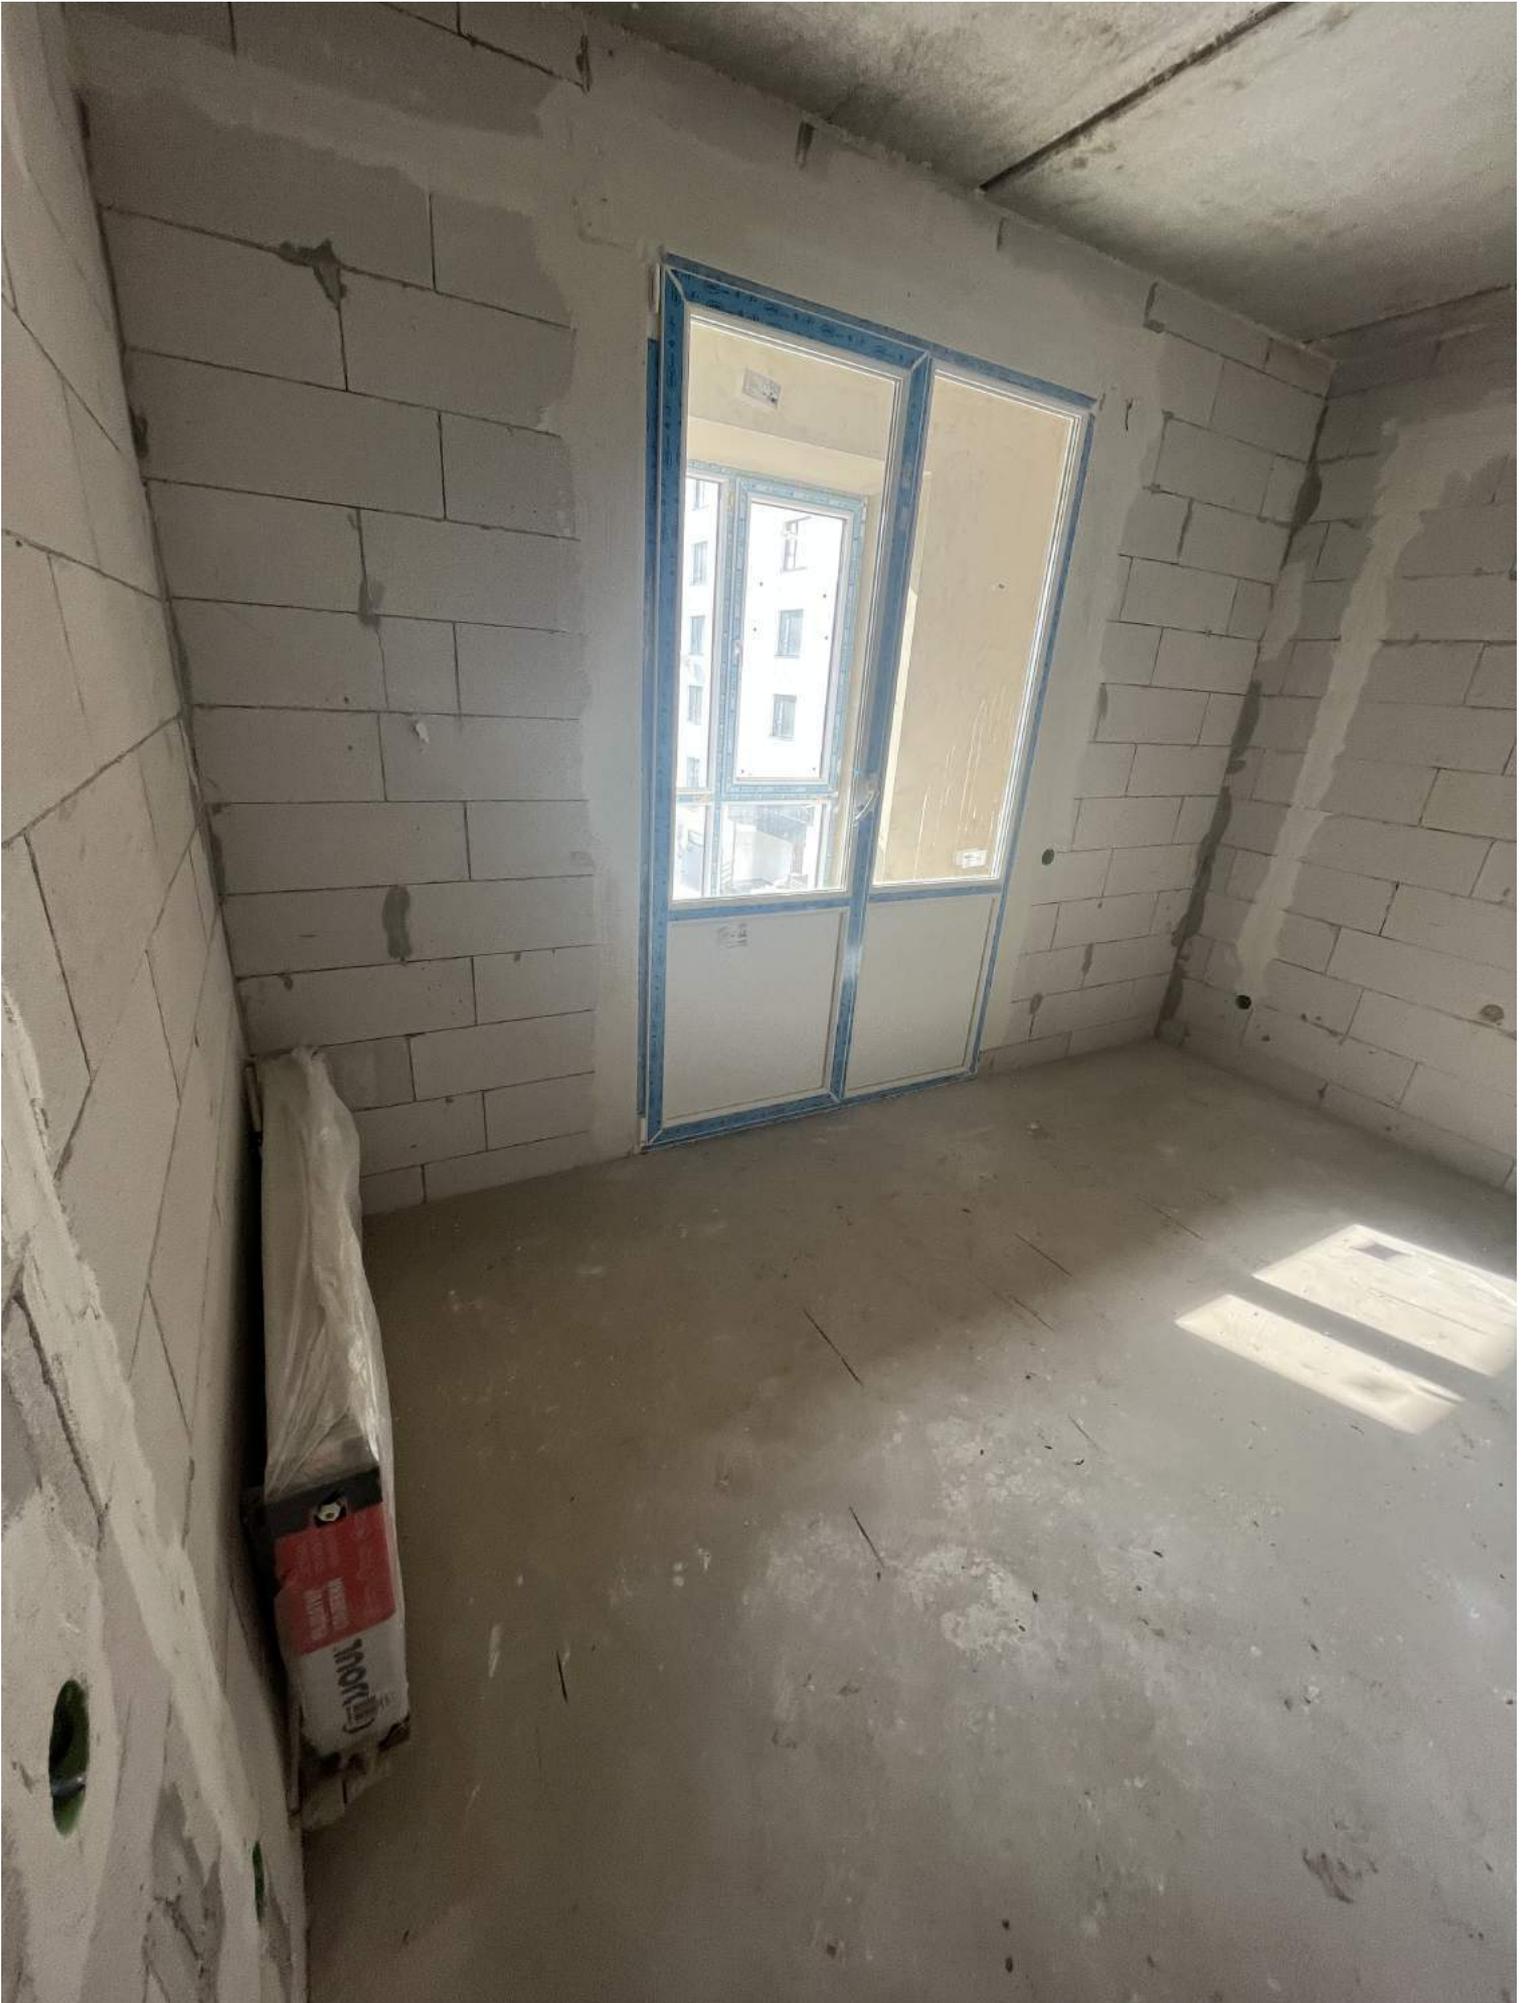



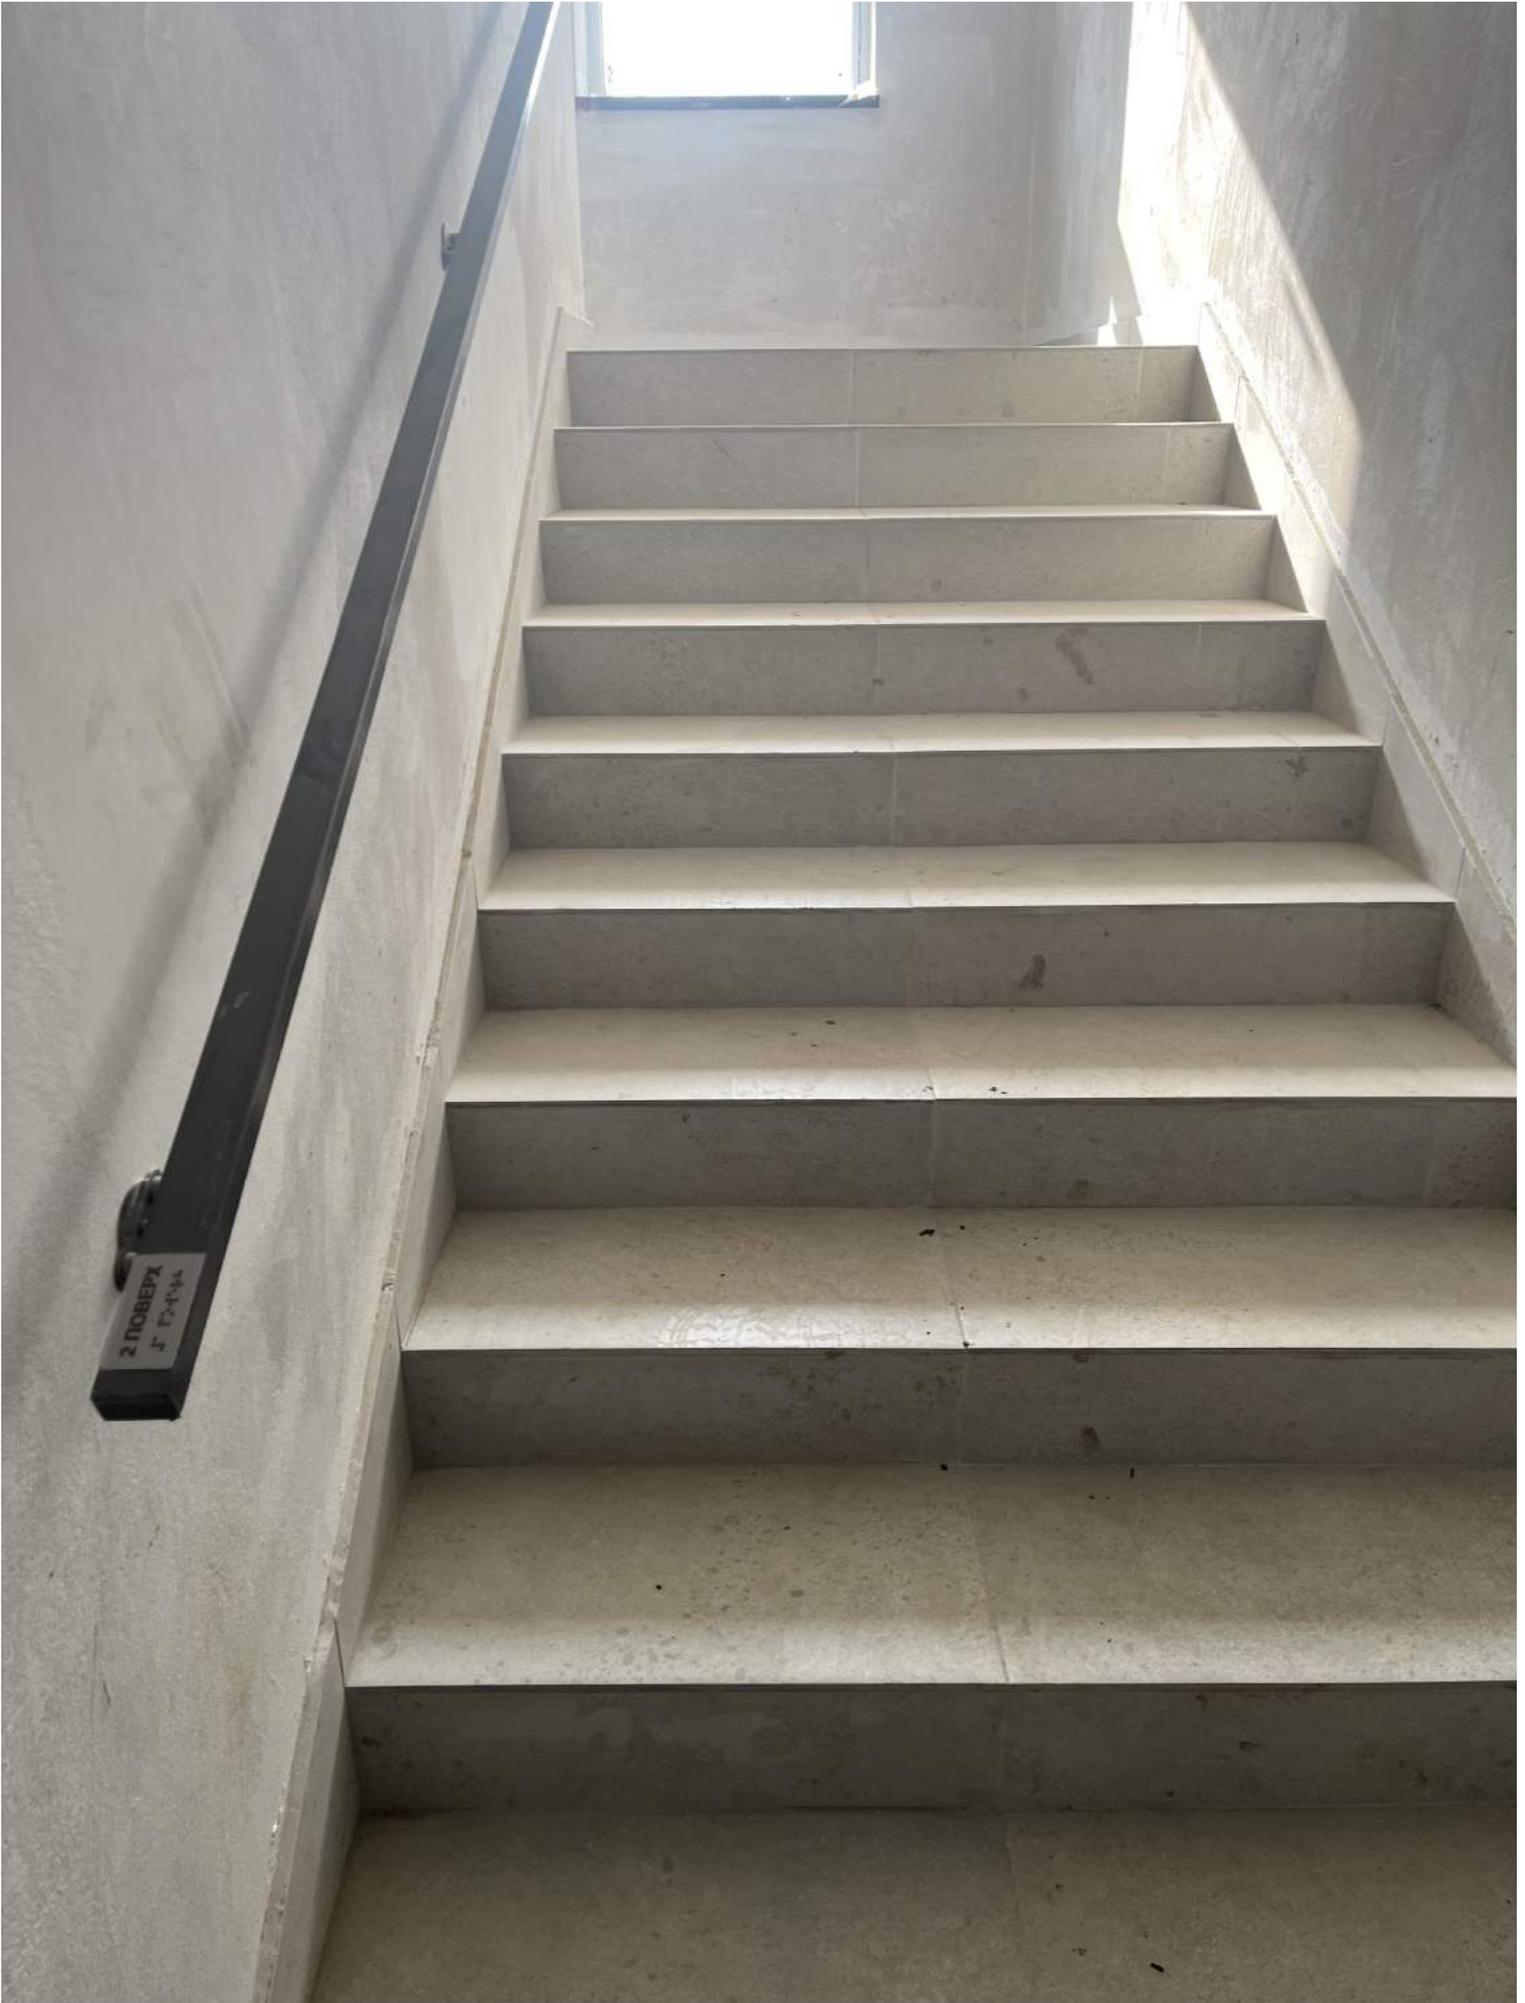

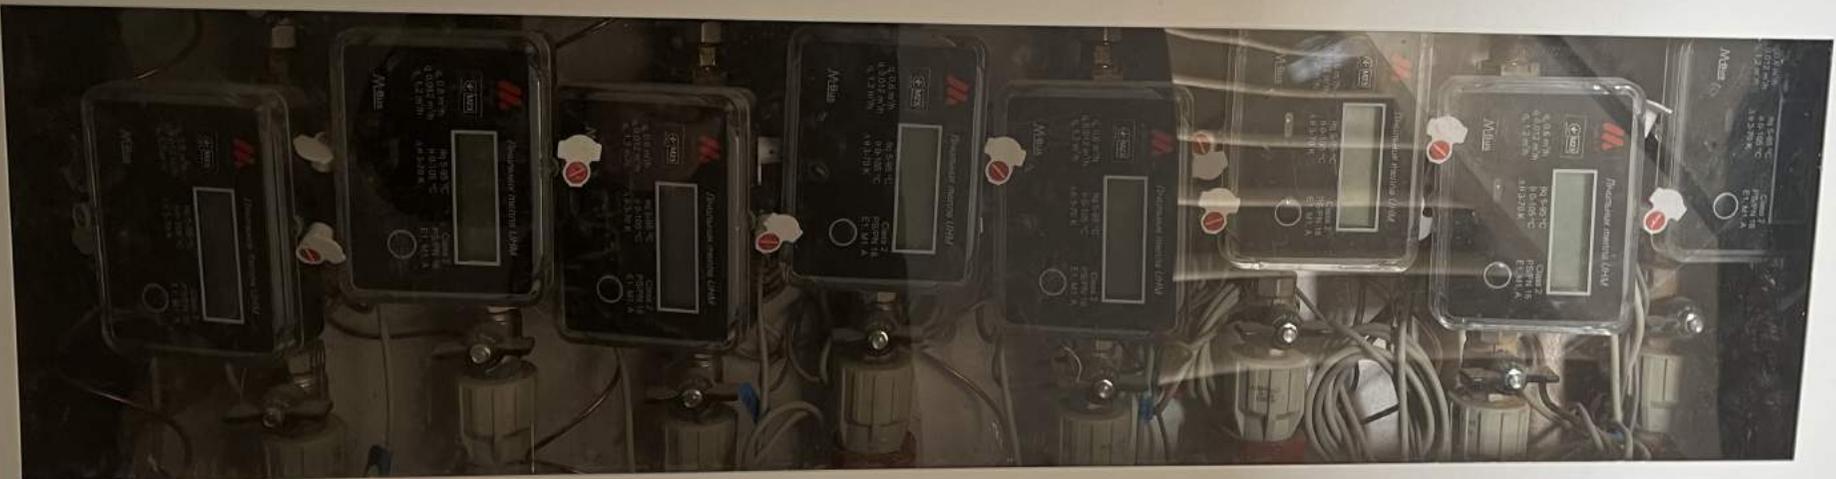


































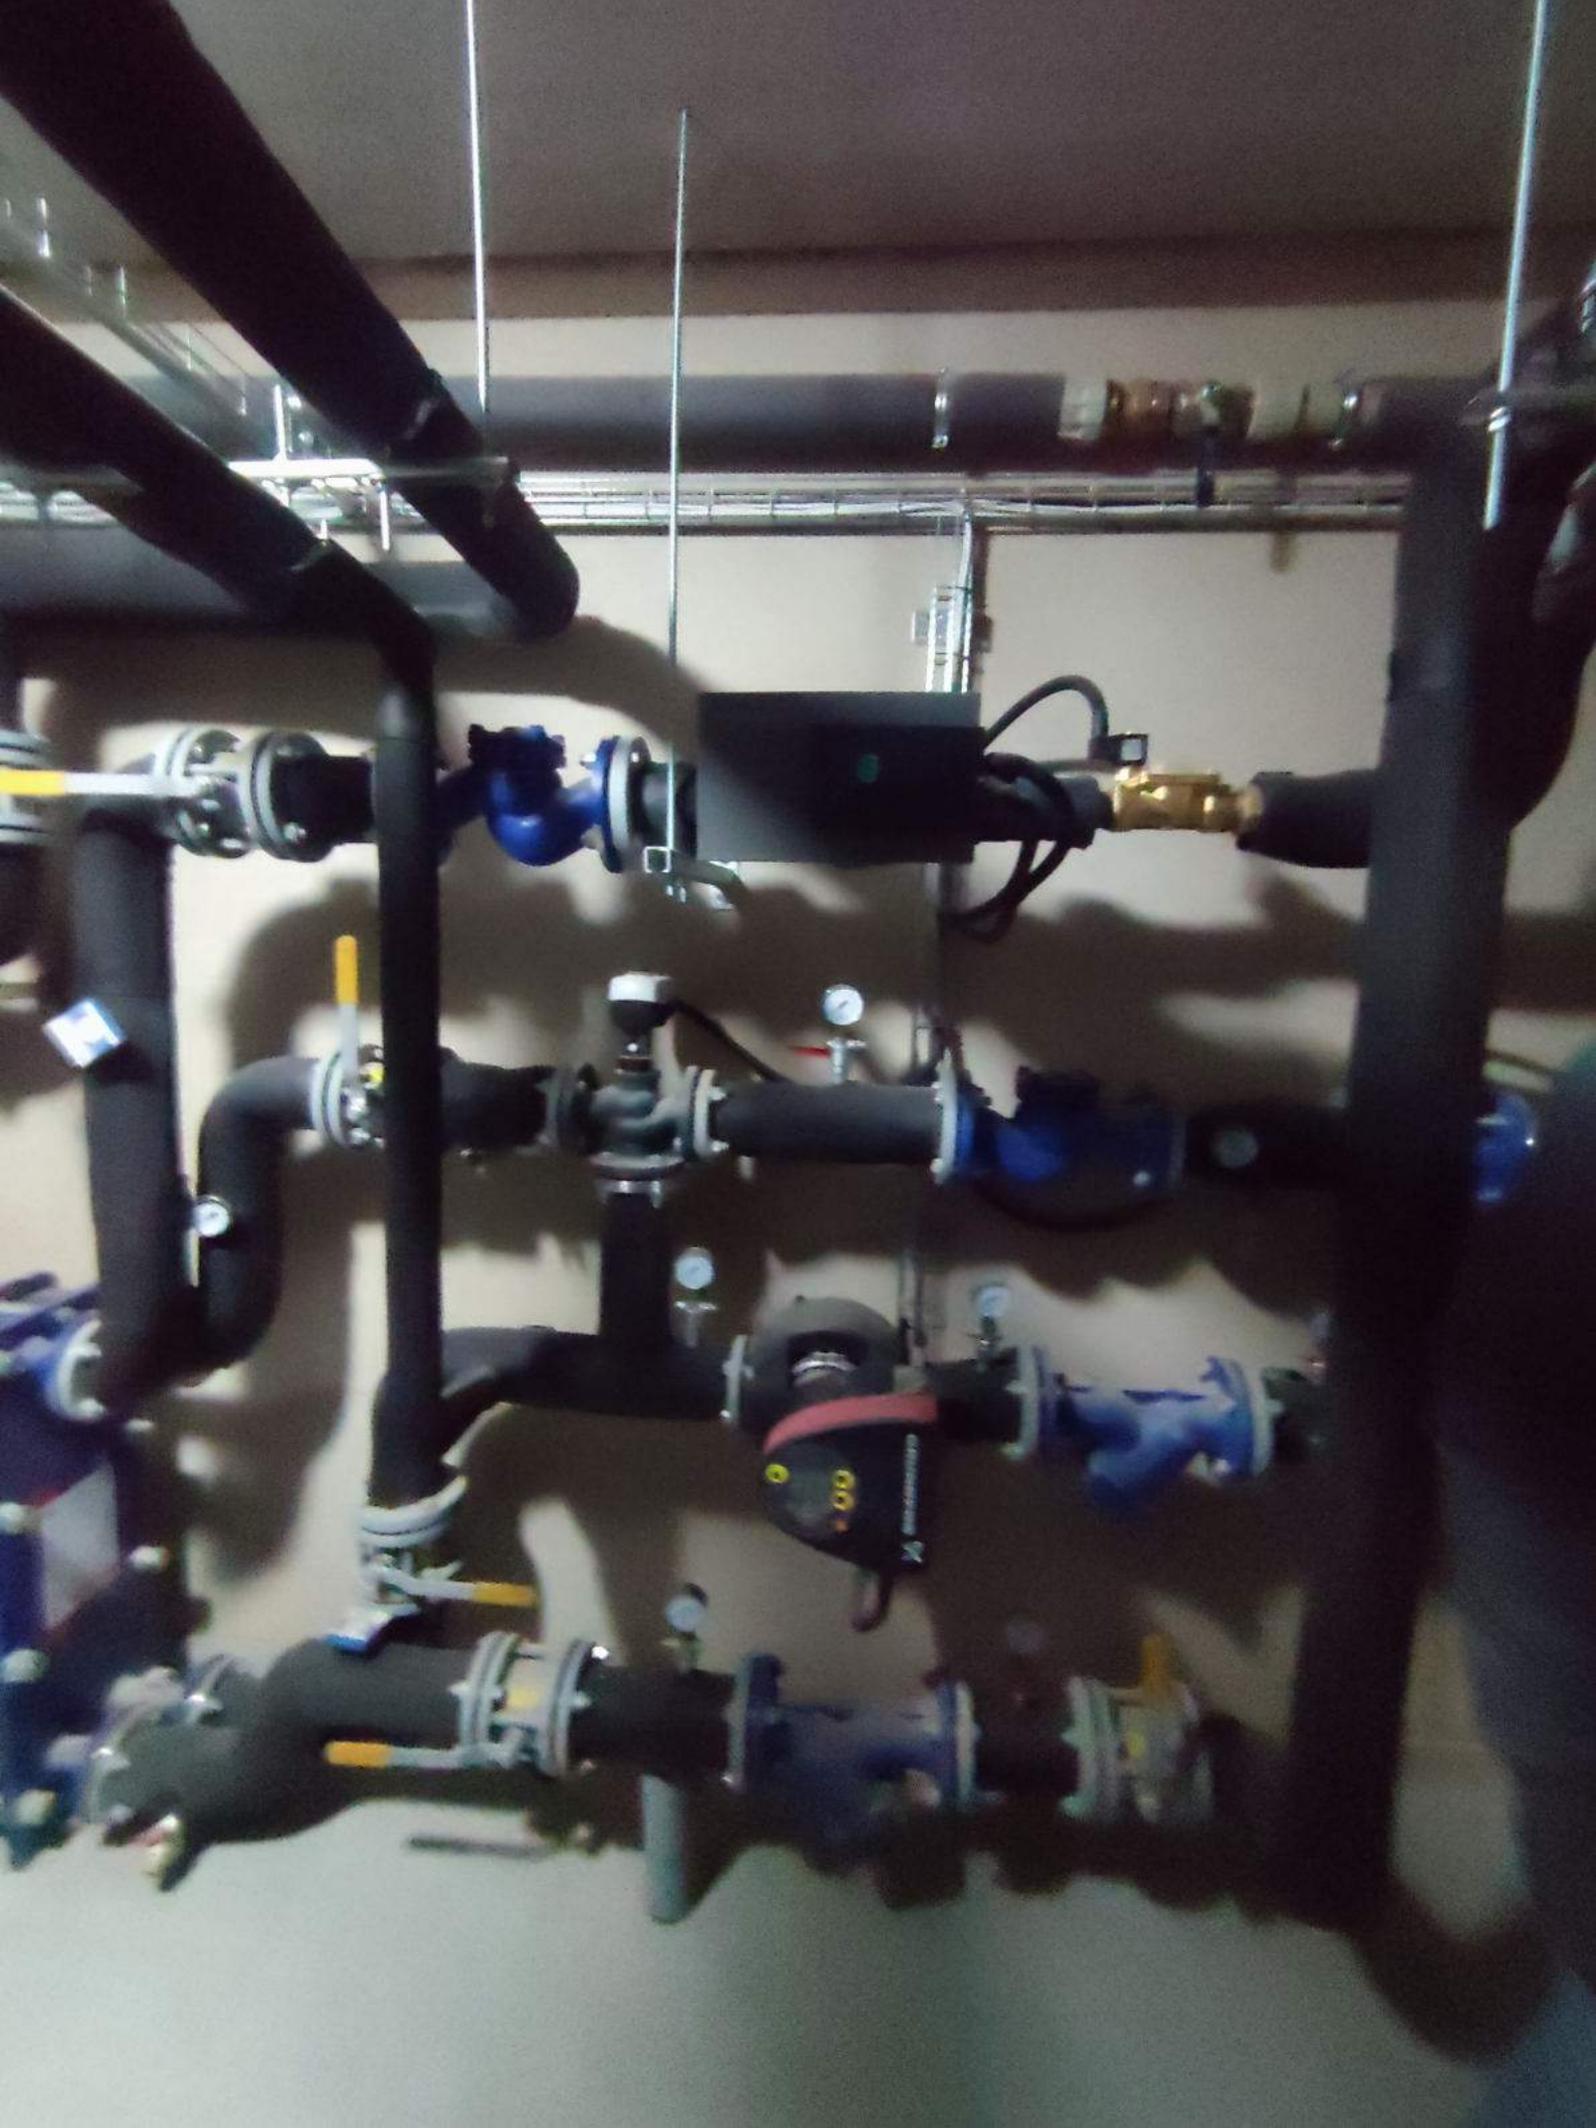

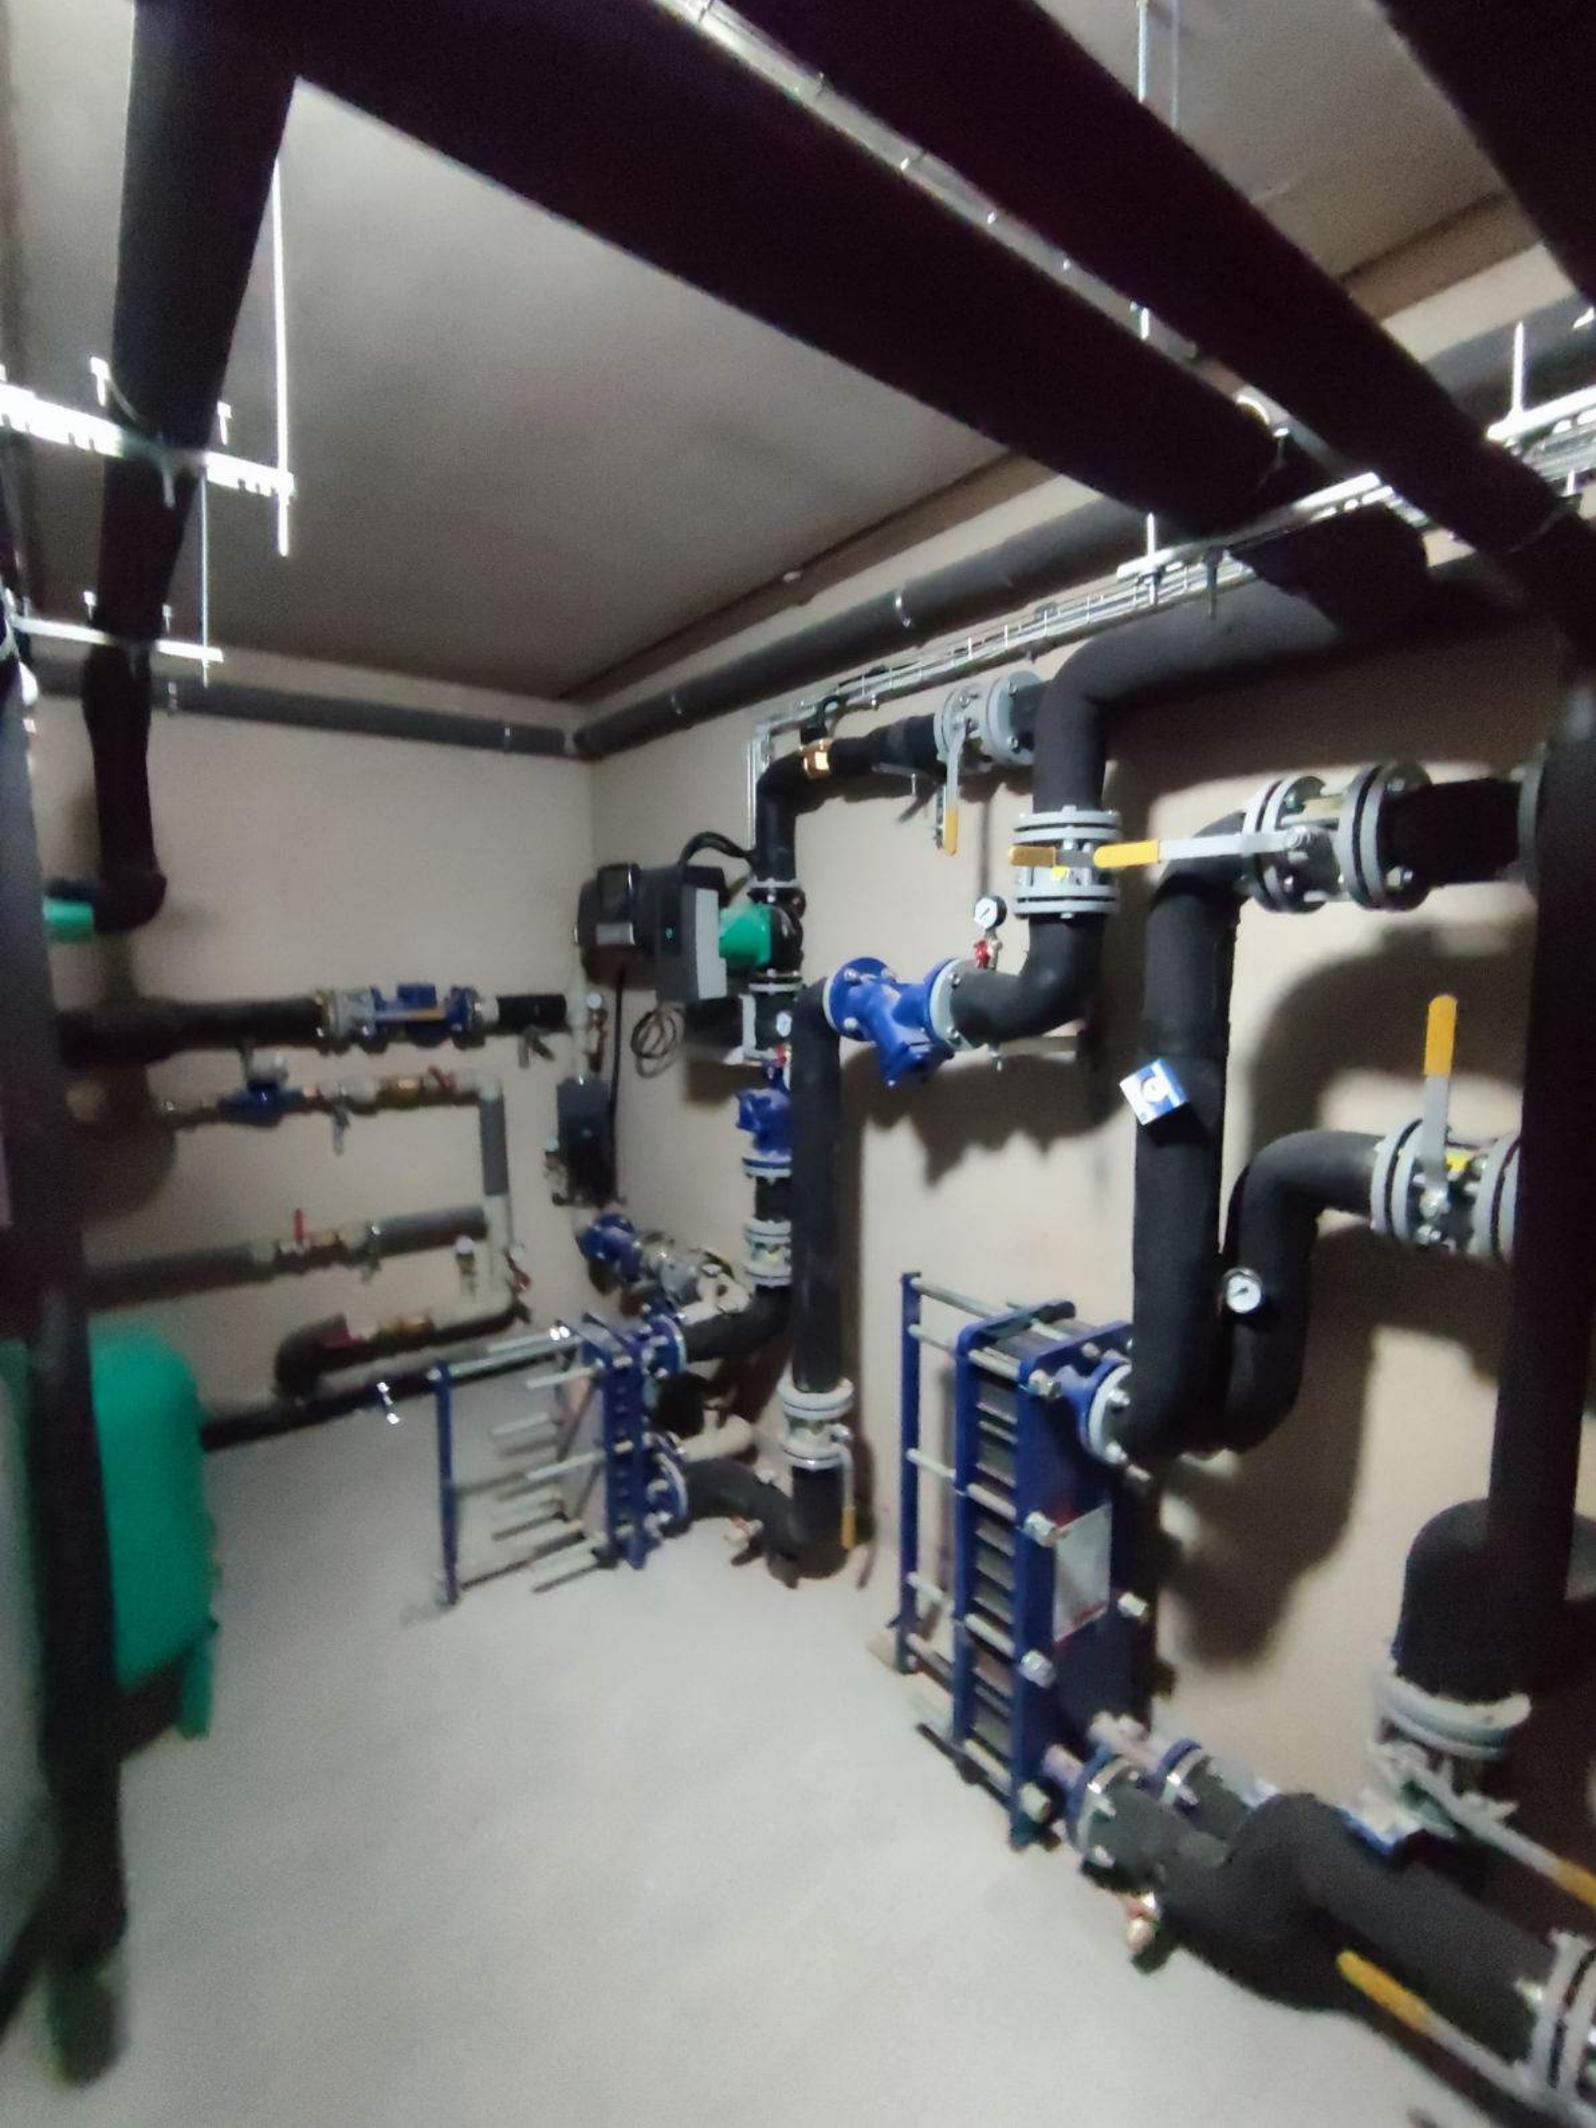

















ВИХІД























White electrical meter with a red wire running vertically above it.

Vertical grey pipe with several horizontal bands or joints.

Window frame with blue trim and glass panes reflecting a colorful object.





355













ВИХІД

ОХОРОНА
0901811002









ВИХІД

ОБ'ЄКТ
МОНІТОРИНГ

ВИХІД















ВІХІД


























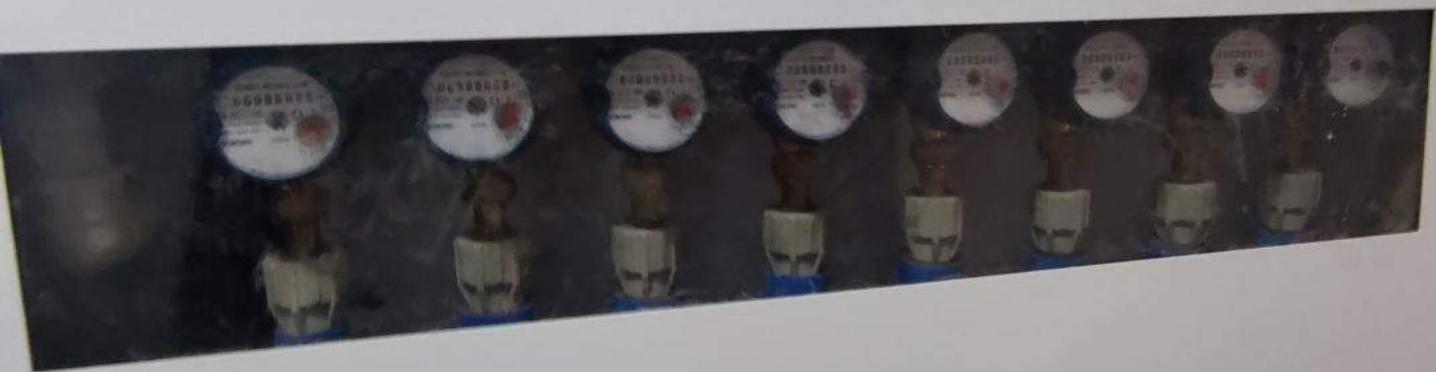










































7
ПОВЕРХ



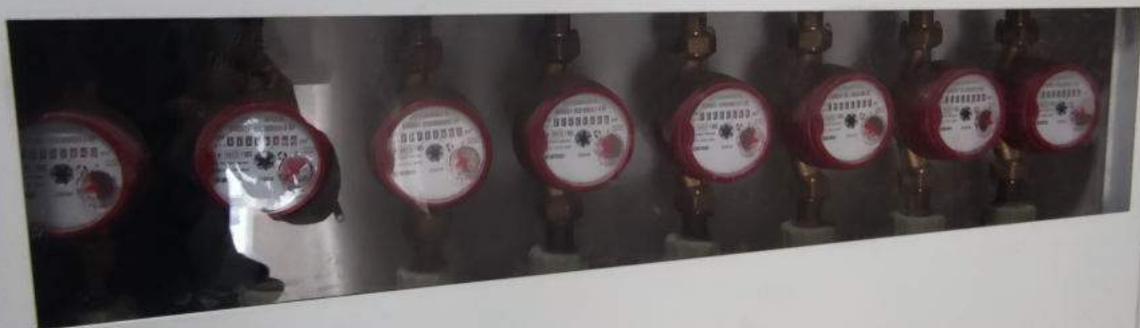









































9 ПОВЕРХ






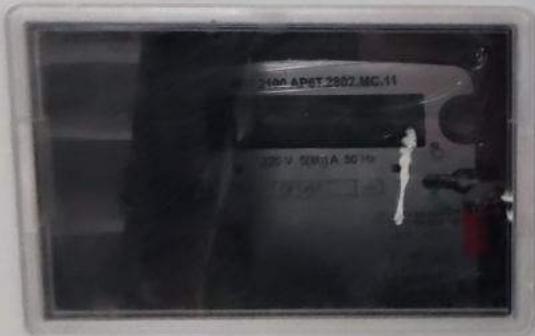




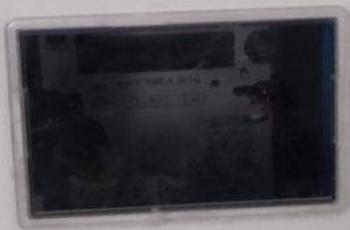

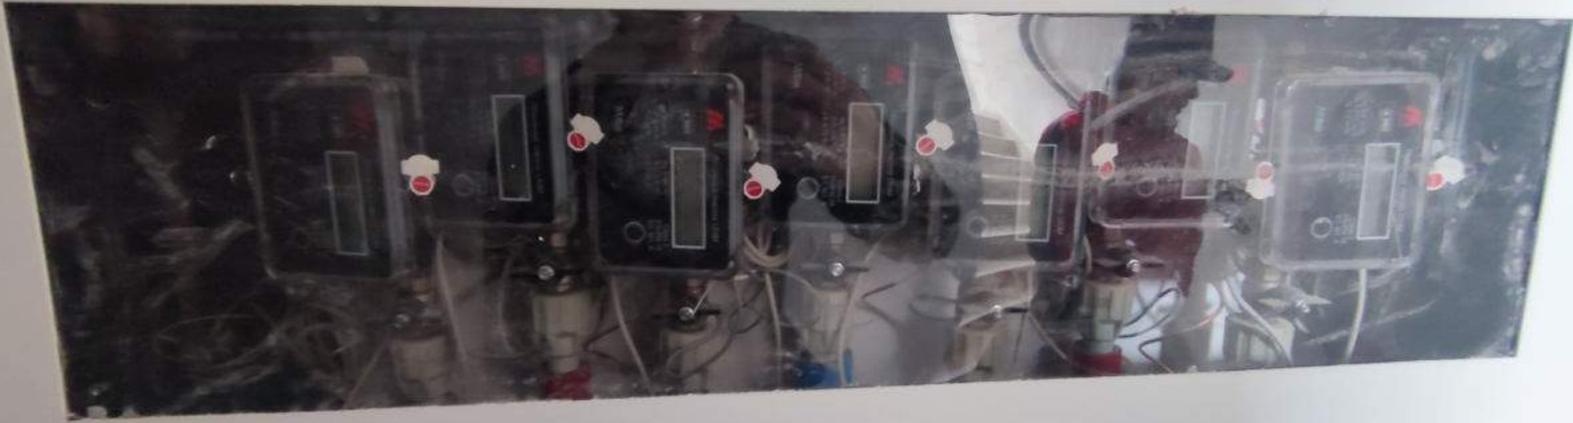





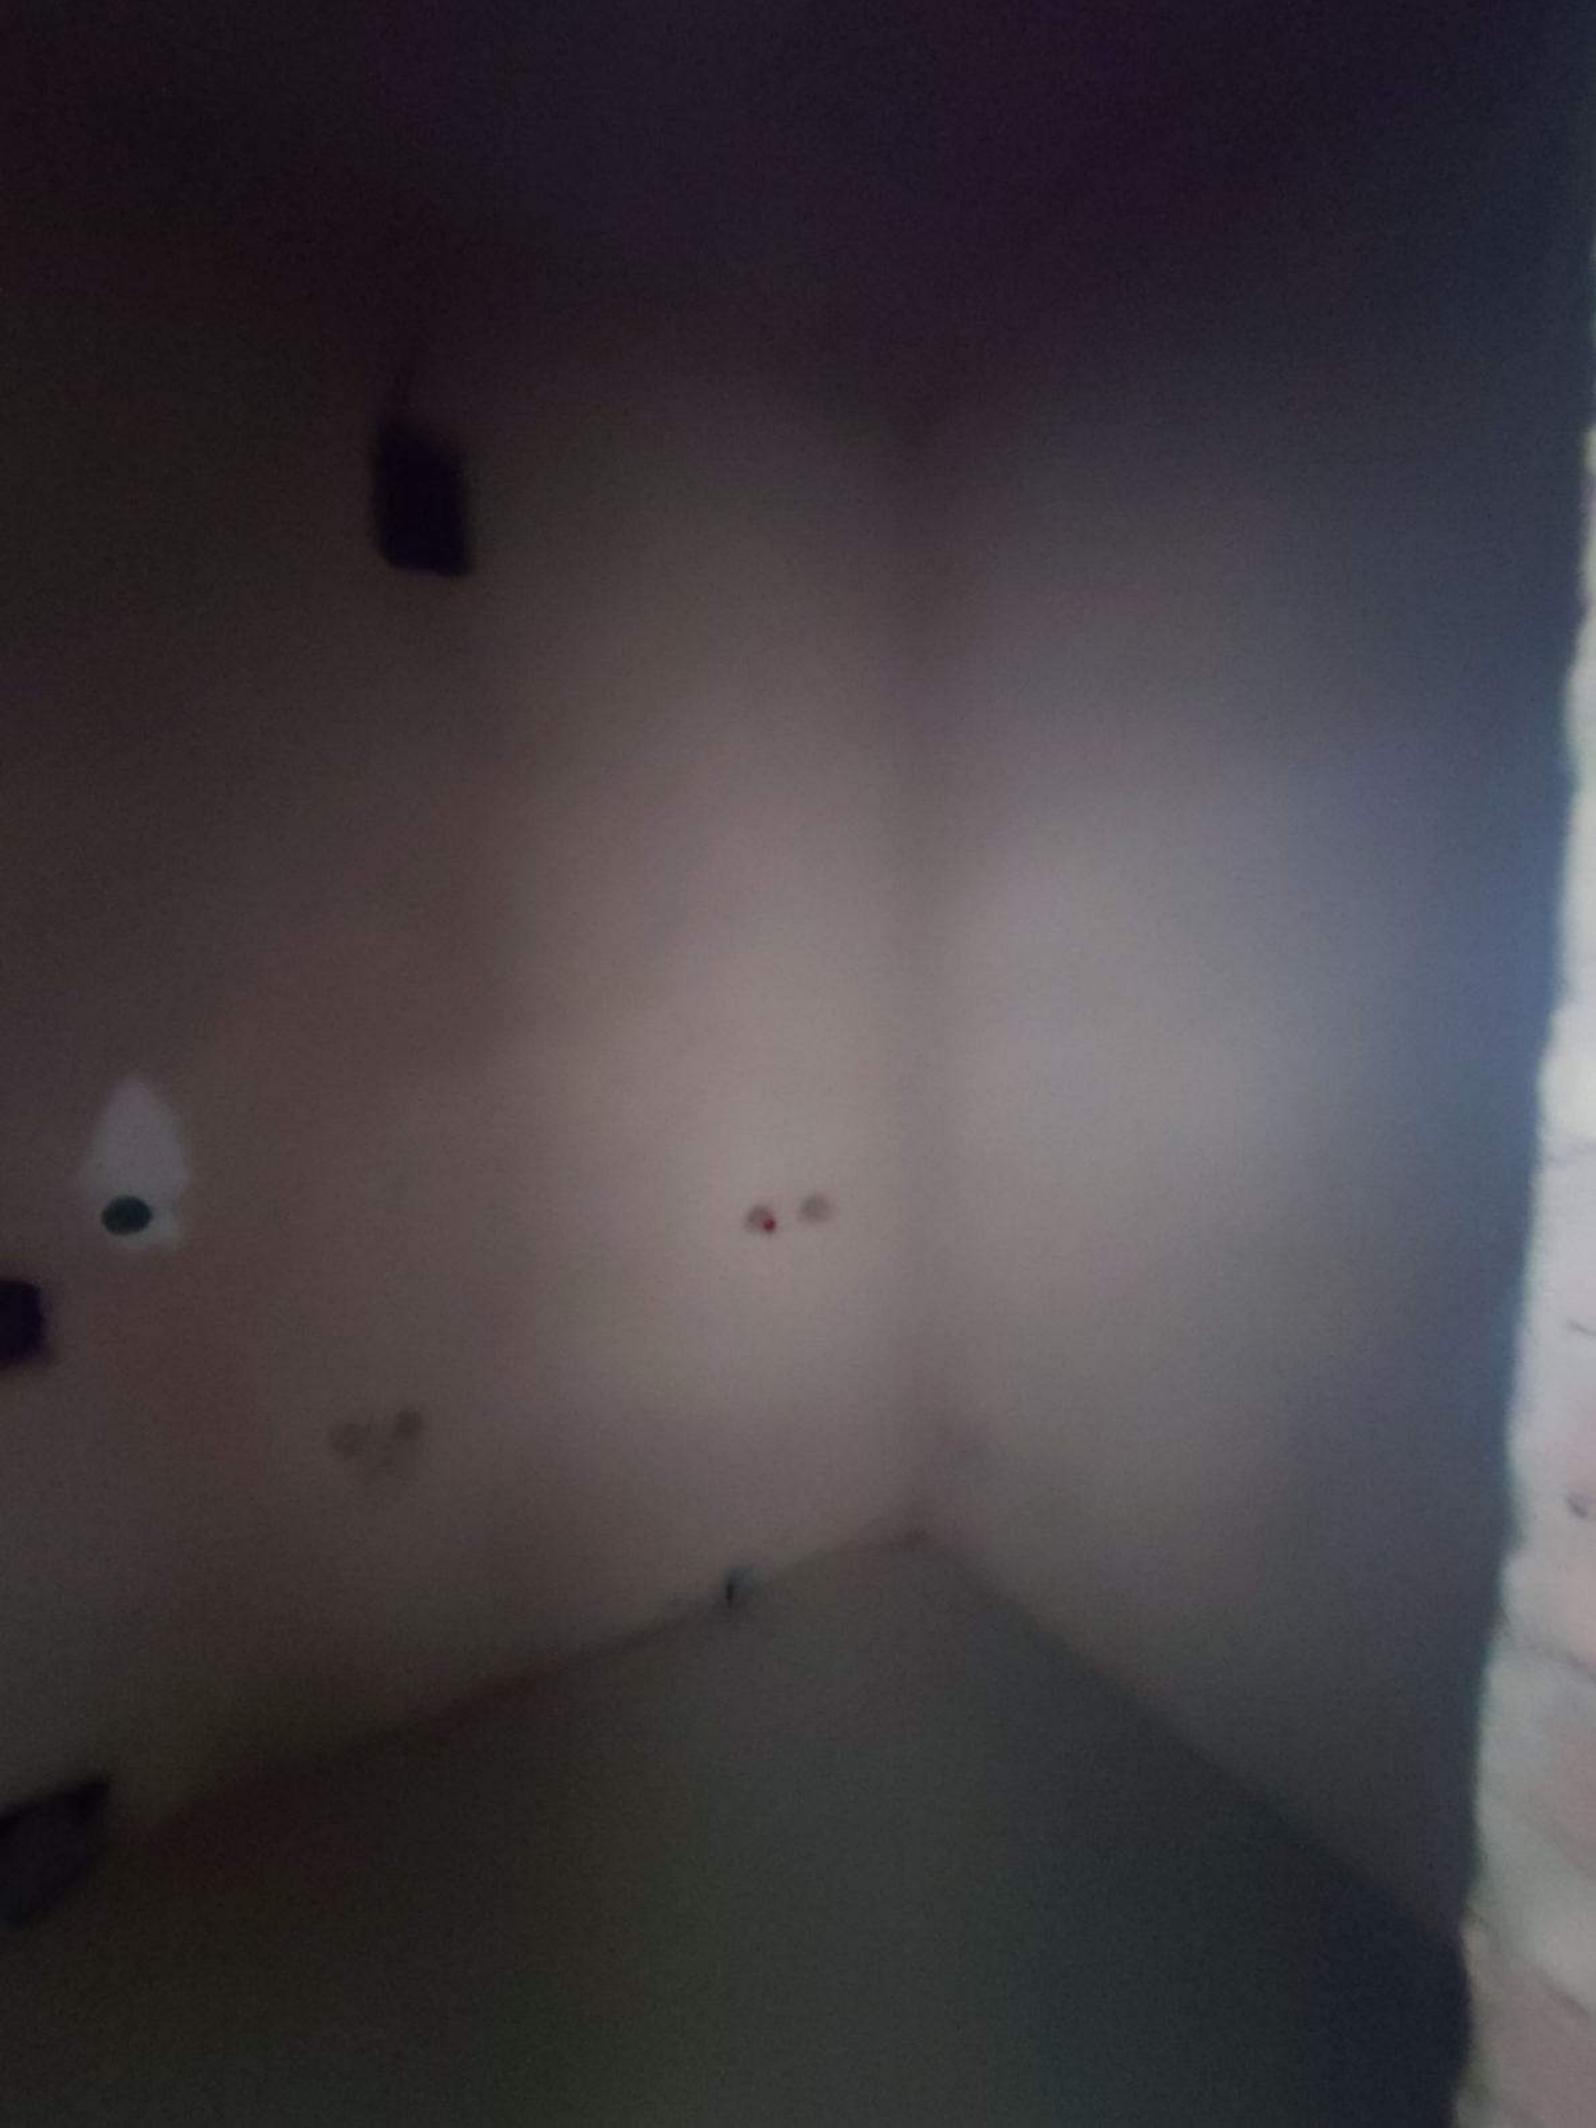

































ВИХІД









MFR#
SIZE:



OPERATING SPECIFICATIONS

MAX. PRESSURE 10.5 Bar (150 Psi)

TEMPERATURE 50°C (122° F)

TEMPERATURE 1°C (34° F)

MAXIMUM PRESSURE 140 mmHg (5.5" Hg)

(MAX. PRESSURE)

REQUIRED SPECIFICATIONS

HANDLING INSTRUCTIONS

VESSEL APPROVED FOR WATER
FILTRATION USE ONLY. ALL
OTHER APPLICATIONS MUST BE
APPROVED BY MANUFACTURER.

DO NOT USE FOR PNEUMATIC OR
HYDRO-PNEUMATIC APPLICATION.

VESSEL MUST NOT BE EXPOSED TO
TEMPERATURE BELOW -30°C (-22° F)

FULFILL ALL REQUIREMENTS OF P.E.D. 2014/68/EU DIRECTIVE
APPLICABLE FOR DRINKING WATER FOLLOWING KTW
RECOMMENDATIONS

FOR SOFTENER PRESSURE VESSEL IS TESTED AGAINST
EN ISO 1101 STANDARD 44 FOR MATERIAL AND STRUCTURAL
REQUIREMENTS ONLY.

VESSEL WITH POLYETHYLENE INNER SHELL











Вогнегаситель



3A

1. Водяной

заполнитель

ПРИСОДИ

НАПРЯЖ









Four white water heaters are stacked on black bases. Each unit has a control panel with a digital display and several buttons. The bases feature pressure gauges and valves. A large white pipe runs horizontally across the top of the units.



Plumbing fixtures and pipes on the left wall. A vertical pipe with a black handle and a yellow handle is visible. A horizontal pipe runs along the top of the wall.













ВАНТАЖ ОПІДІЙОМНІВ



ВАНТАЖОПІДАЙ







Щит комплексу обліку витрати газу
Модель: 2108, 59%
2020 р.

№1084
-07, 114-1172
№1/04

























ВИХІД









ВИХІД























9



