



Three white rectangular labels are attached to a yellow dotted vertical strip on the right wall.

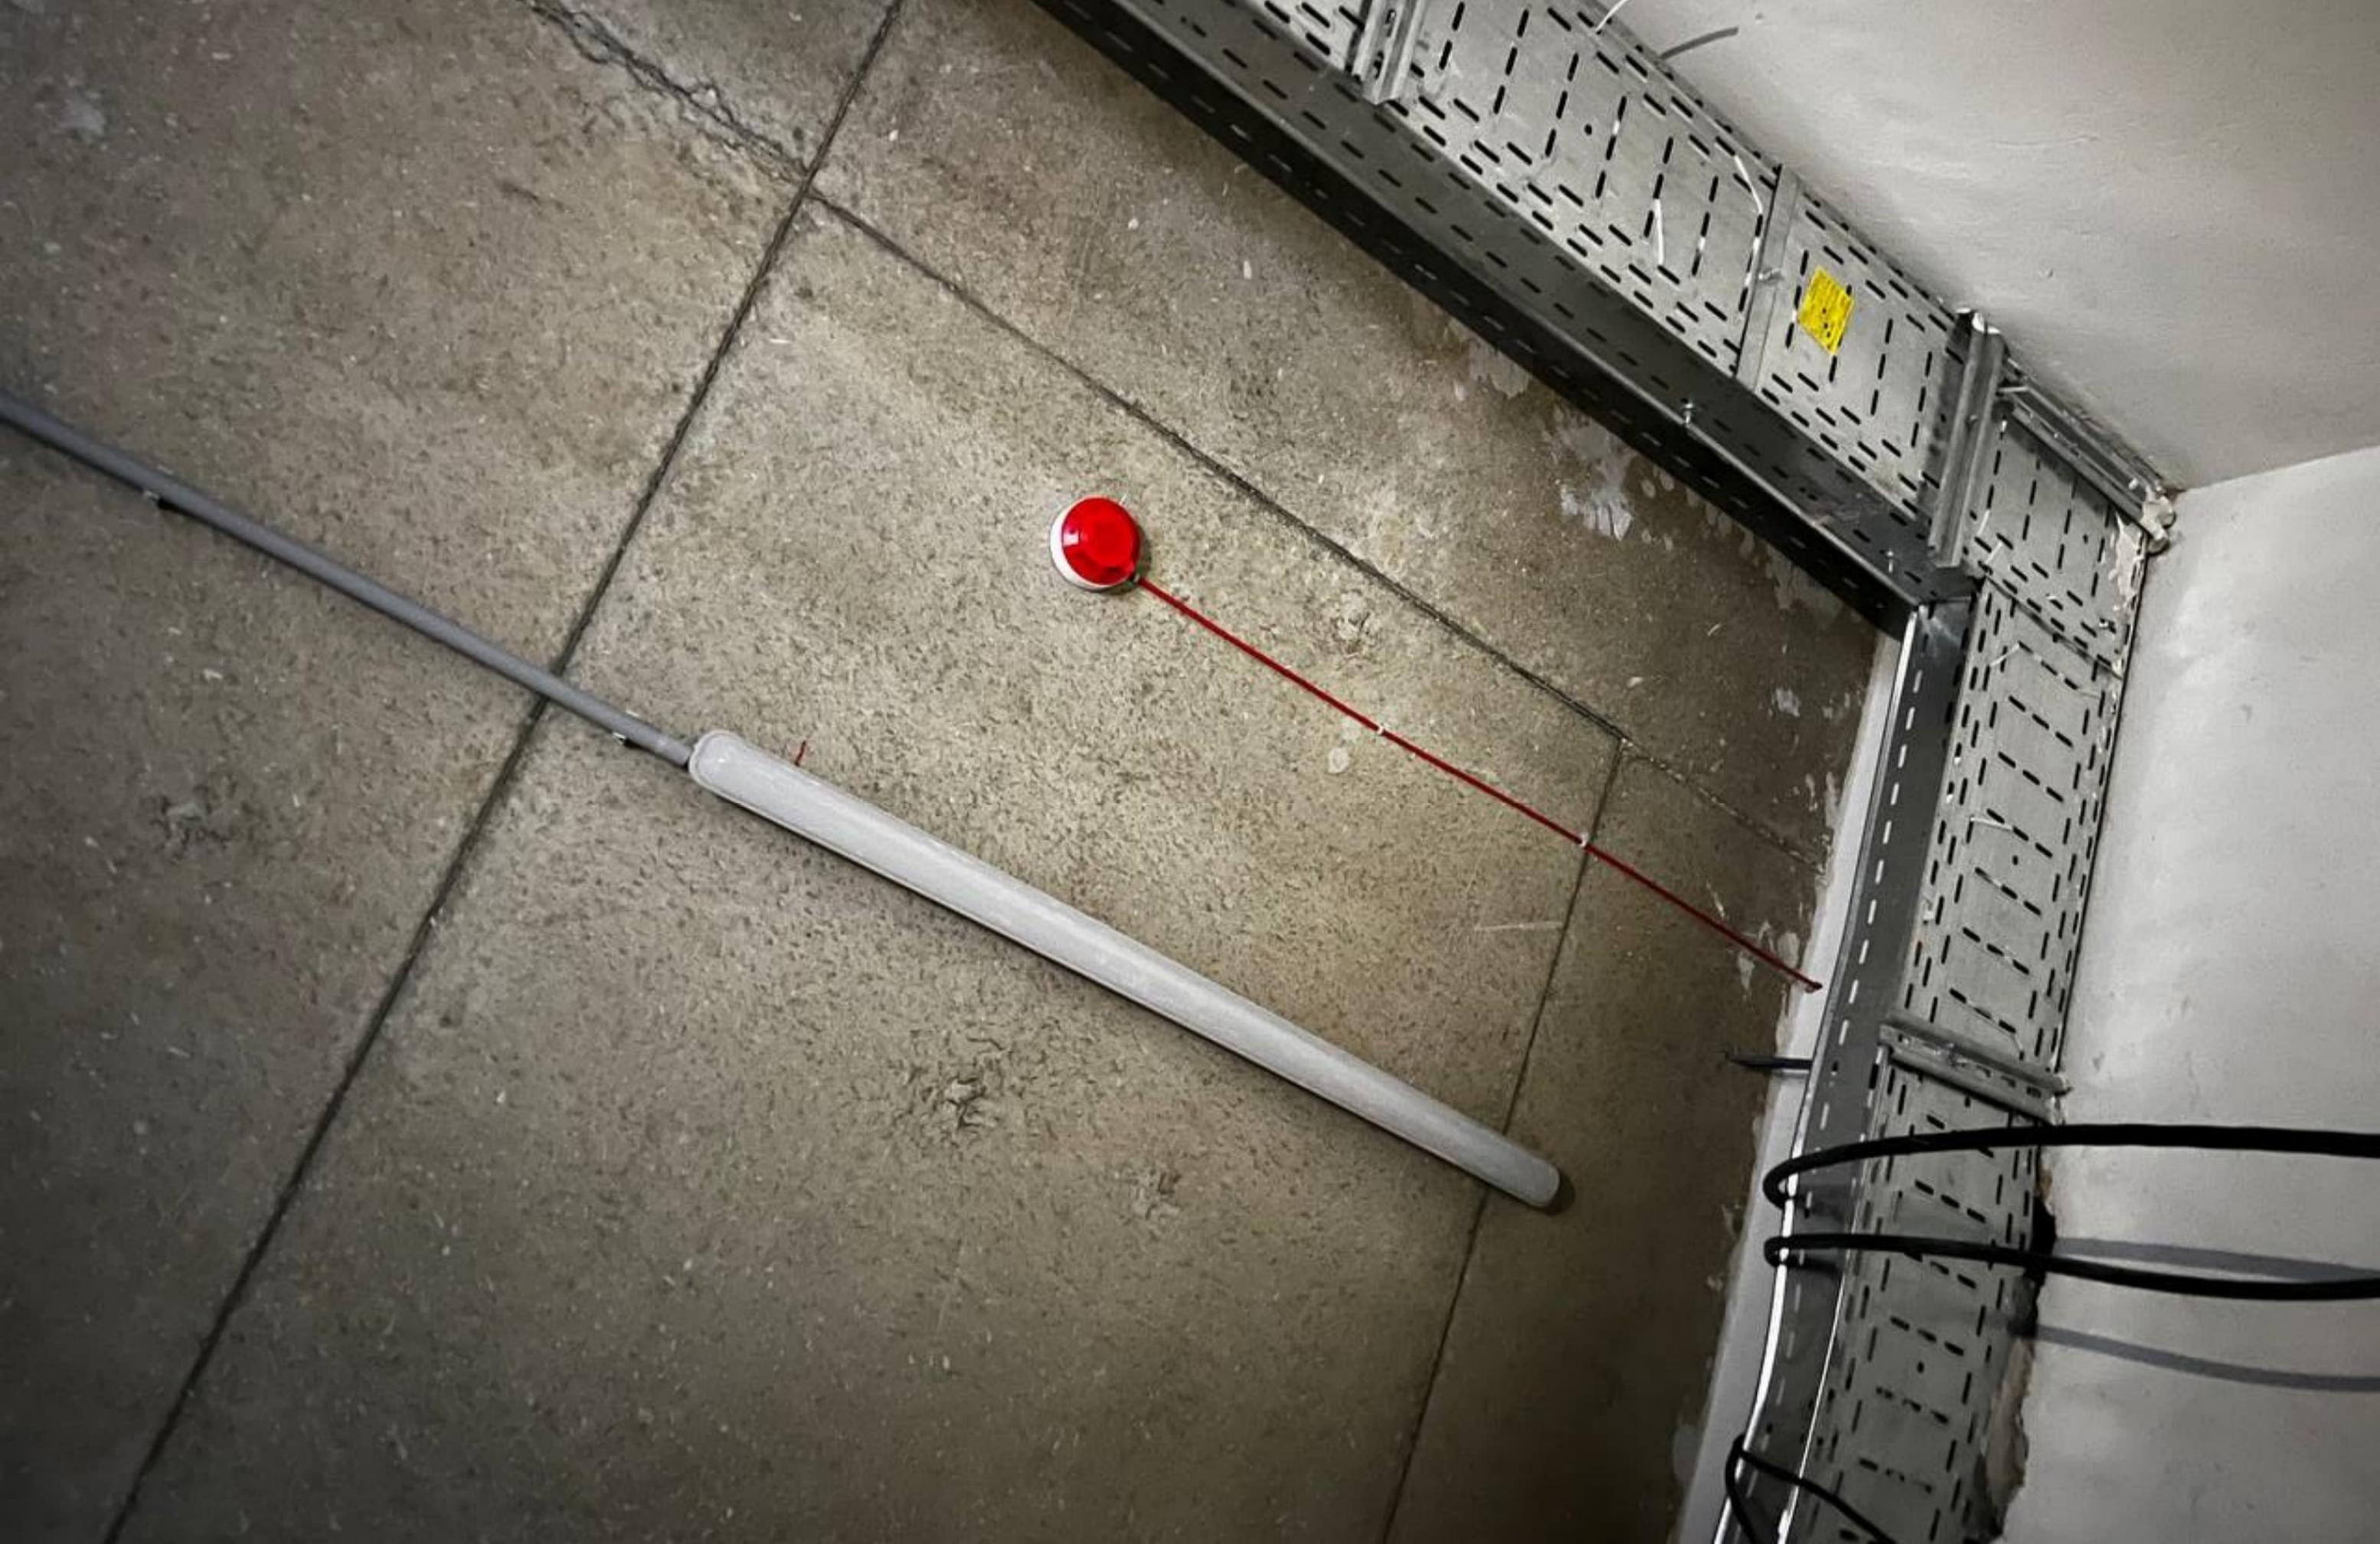

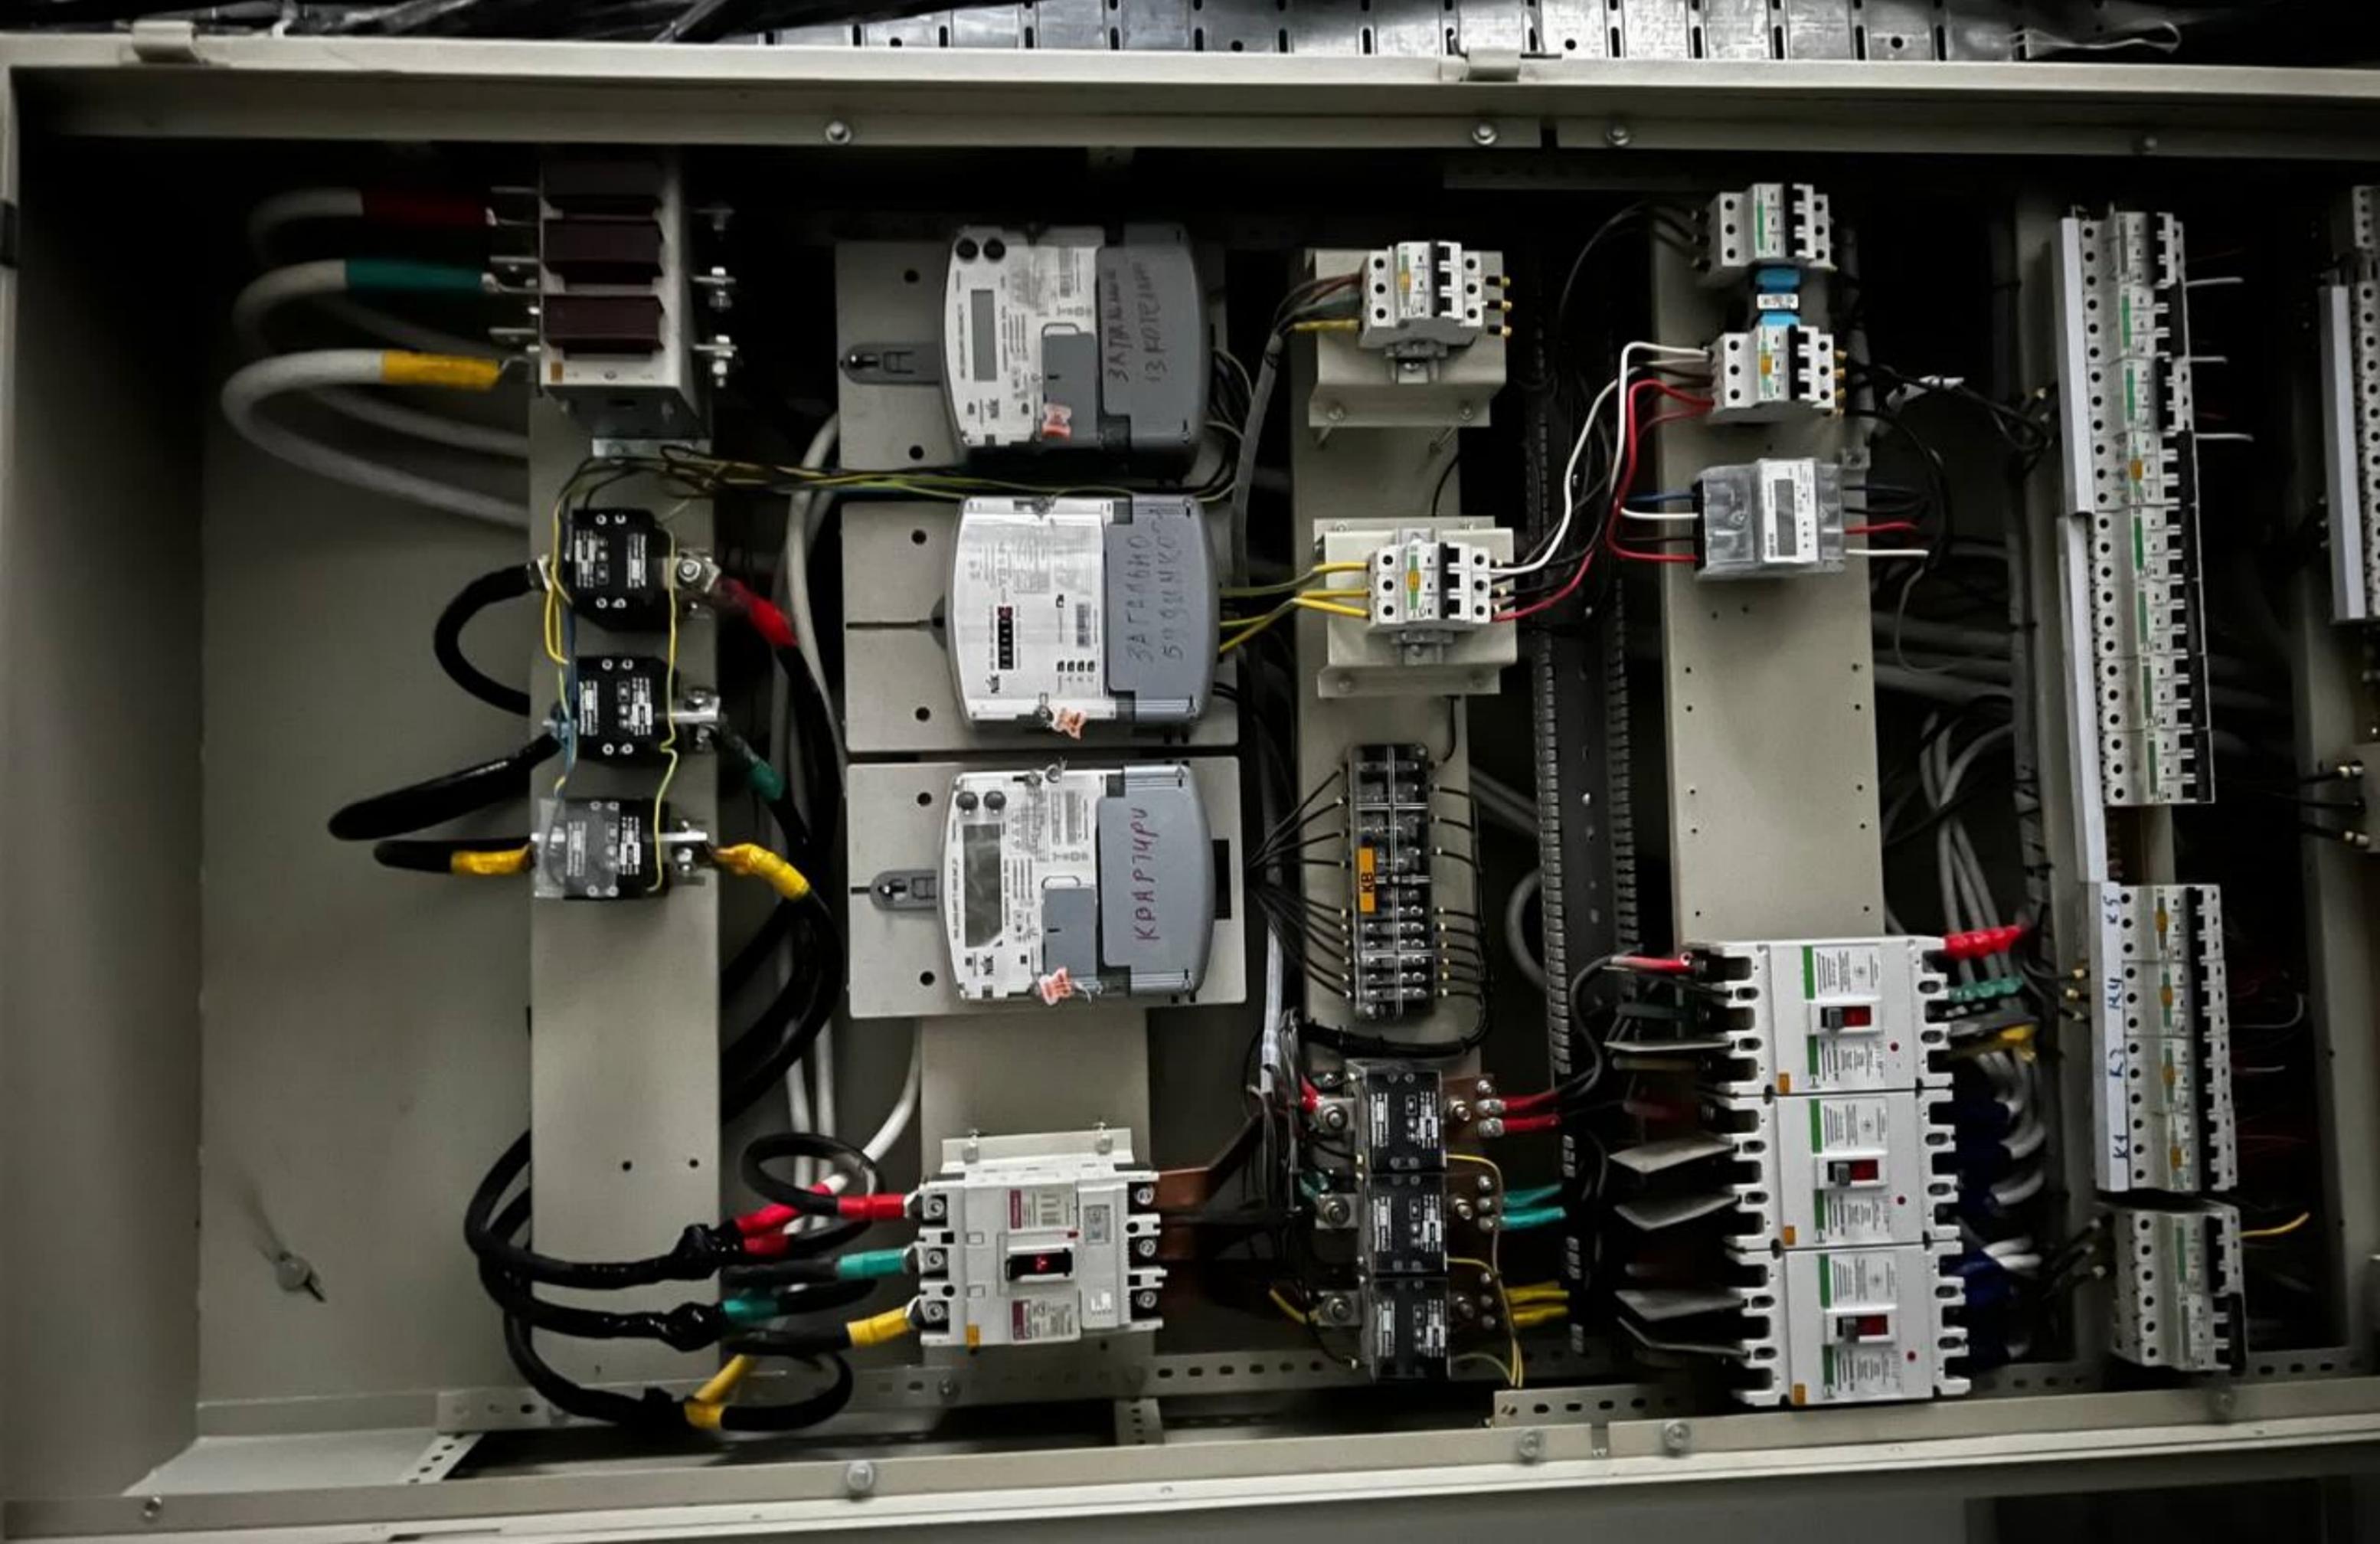

ЗАТРАЖИВА
13 КОТЕЛНИ

ЗАТРАЖИВА
5000000

КРАТЧУВ

KB

K1 K2 K3 K4 K5

















Rheem

INSTALLATION INSTRUCTIONS
See page 1 for details.
See page 2 for details.
See page 3 for details.
See page 4 for details.
See page 5 for details.
See page 6 for details.
See page 7 for details.
See page 8 for details.
See page 9 for details.
See page 10 for details.

INSTALLATION INSTRUCTIONS
See page 1 for details.
See page 2 for details.
See page 3 for details.
See page 4 for details.
See page 5 for details.
See page 6 for details.
See page 7 for details.
See page 8 for details.
See page 9 for details.
See page 10 for details.

1. Turn the temperature dial to the desired setting.
2. Turn the flow rate dial to the desired setting.
3. Press the power button to turn the unit on.
4. The digital display will show the current temperature and flow rate.
5. The unit will heat the water to the set temperature.
6. The water will flow out of the tap at the set flow rate.
7. The unit will shut off when the water flow stops.
8. The unit will restart when the water flow resumes.



SACCI


→ SACCI → SACCI → SACCI → SACCI → SACCI → SACCI → SACCI →



→ SACCI →

← SACCI ←



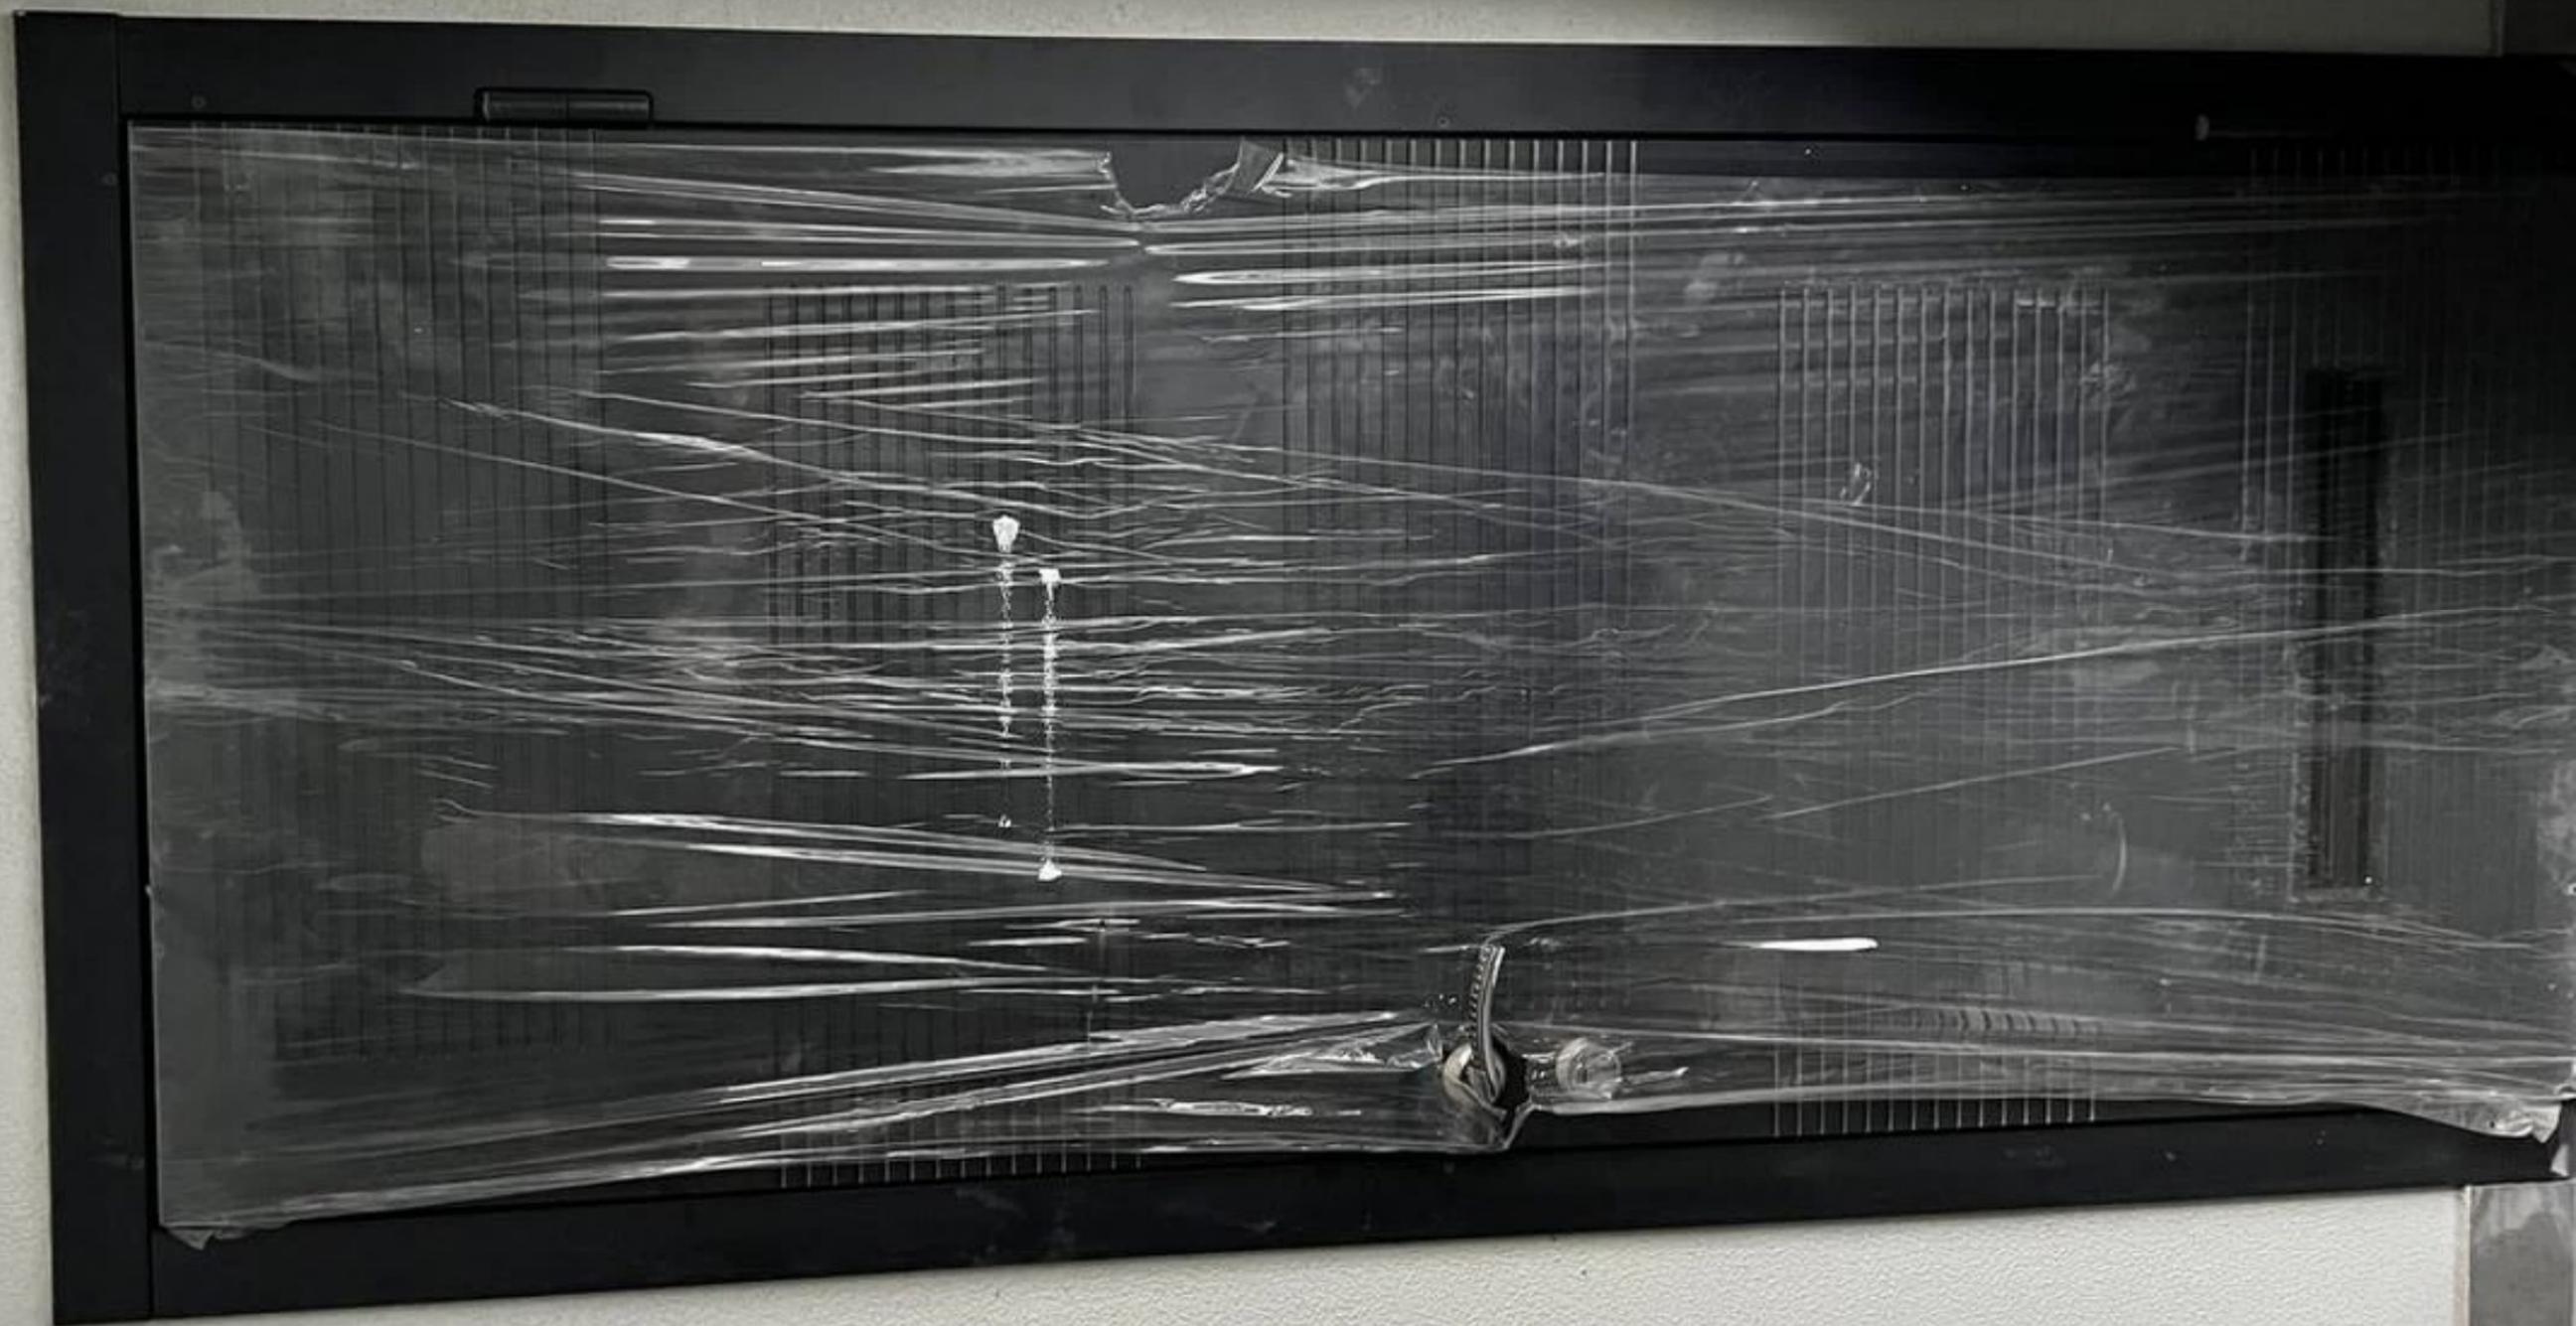















SACCI



SACCI



SACCI




SACCI



SACCI



SACCI



SACCI

SACCI



SACCI



SACCI



SACCI



SACCI



SACCI































APATON

00000

APATON
U.S. PATENTED 2,815,000
MADE IN U.S.A.

M³

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

0.001

Вихід

ВИХІД


УВАГА!
ВЕСЬ ЗАПОБІГТИ ПОВІДНЕННЯМ
АВАРИЙНОЇ СИТУАЦІЇ
ВИКЛИКАЄ СЛУЖБУ ТОВА










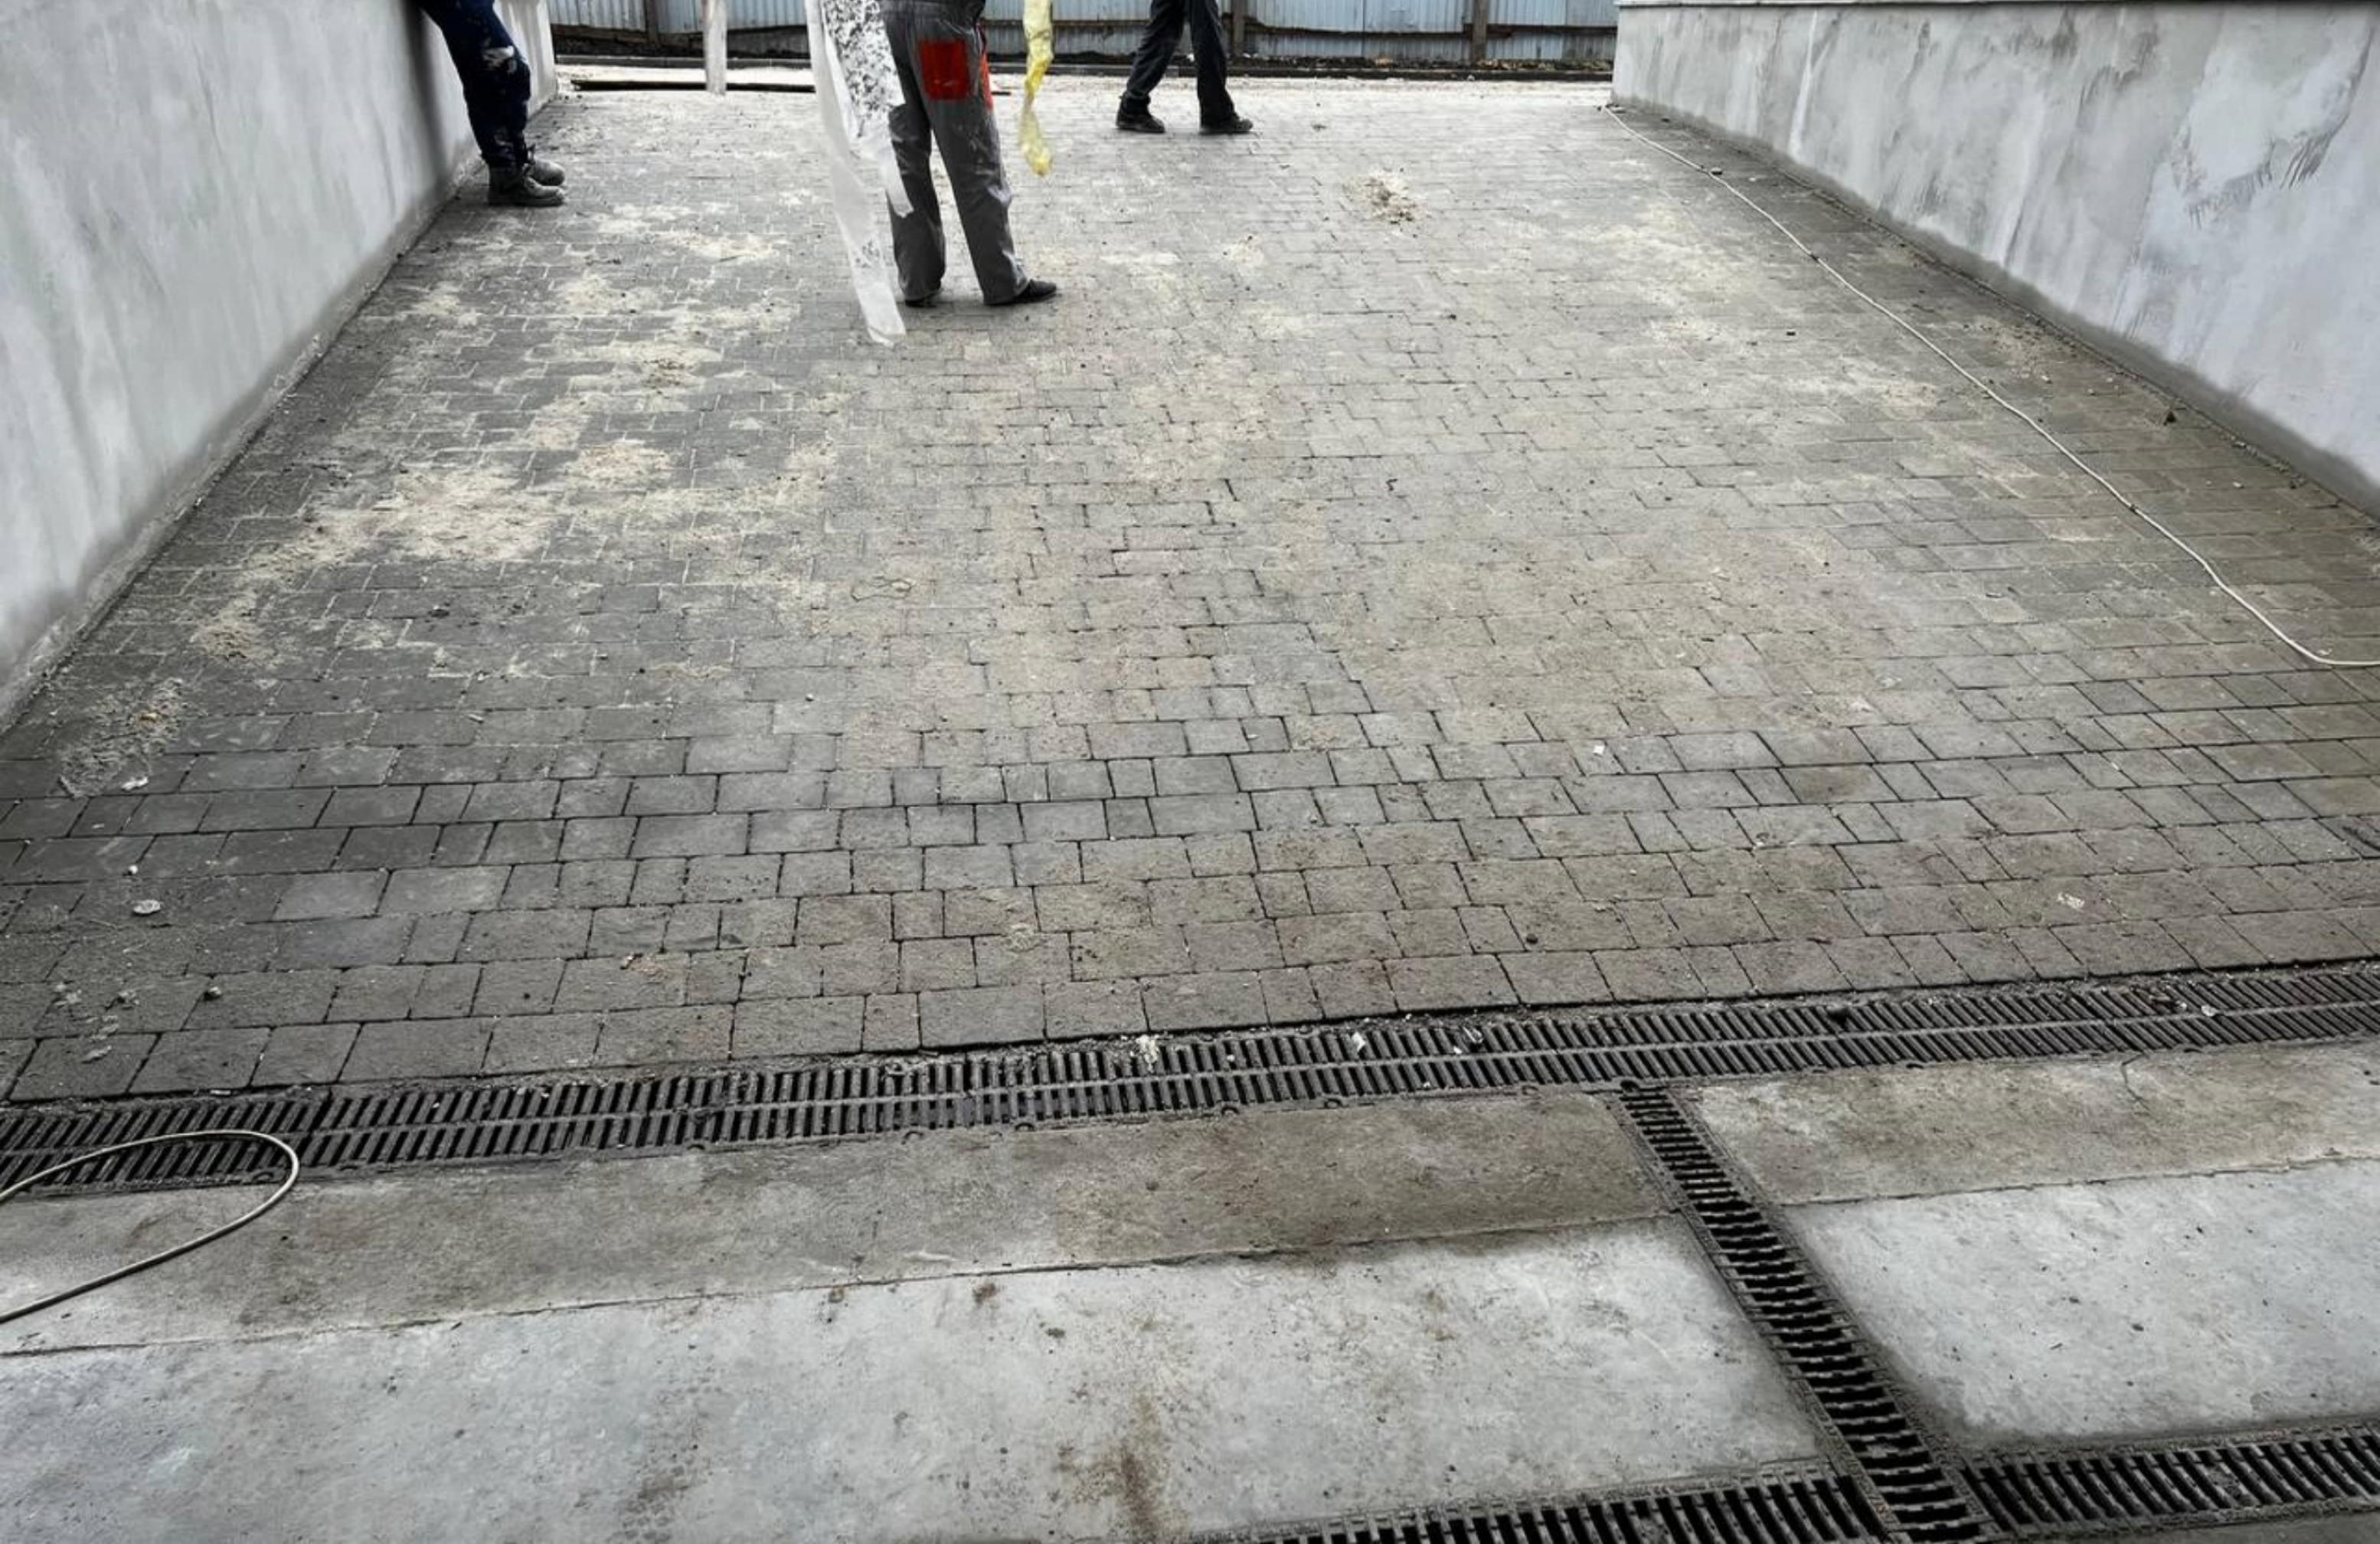

ВИХІД
УВАГА!
Всім заручитися поведінкою!
Адміністративний відділ СІАЗУ
Викличете службу 104



TIPAC-167



The diagram shows a terminal block with 16 numbered positions (1-16) and a 4x4 grid of connection points. It includes two rotary switches and a warning triangle symbol.

CHINA 3716A



Terminal block with 16 numbered positions (1-16) and two indicator lights (red and black).

CHINA 3716A




Terminal block with 16 numbered positions (1-16) and two indicator lights (red and black).










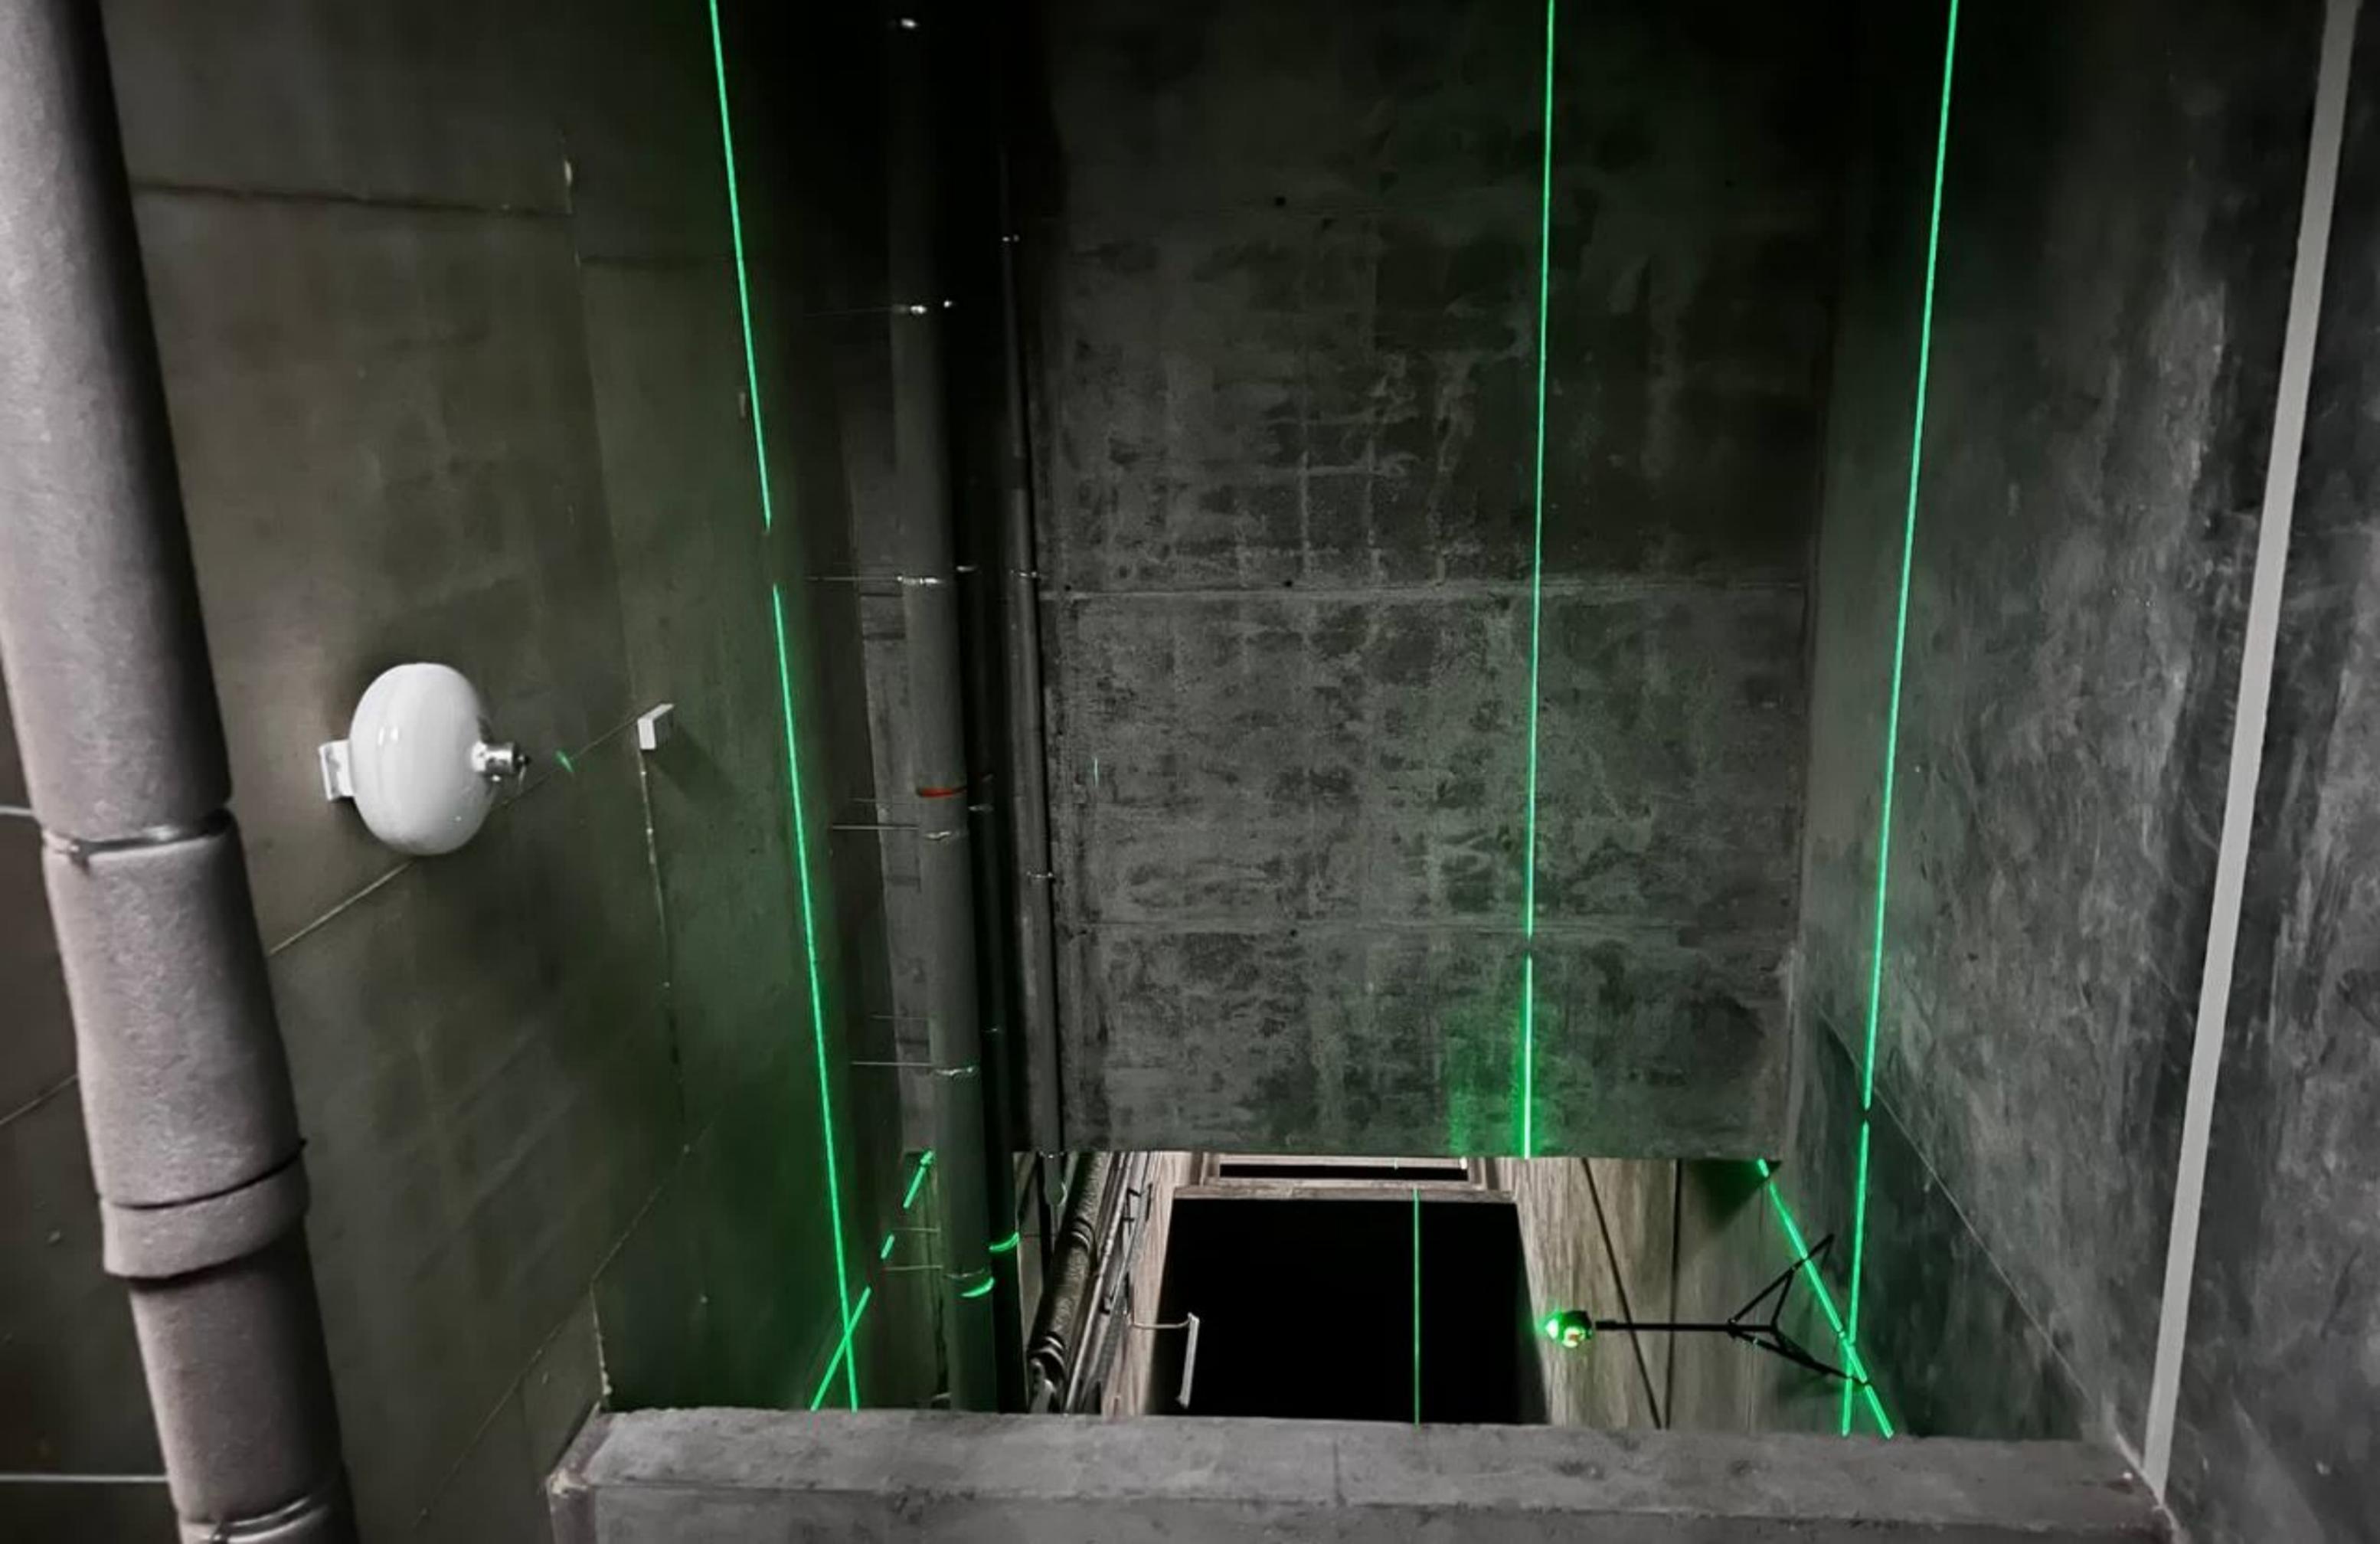



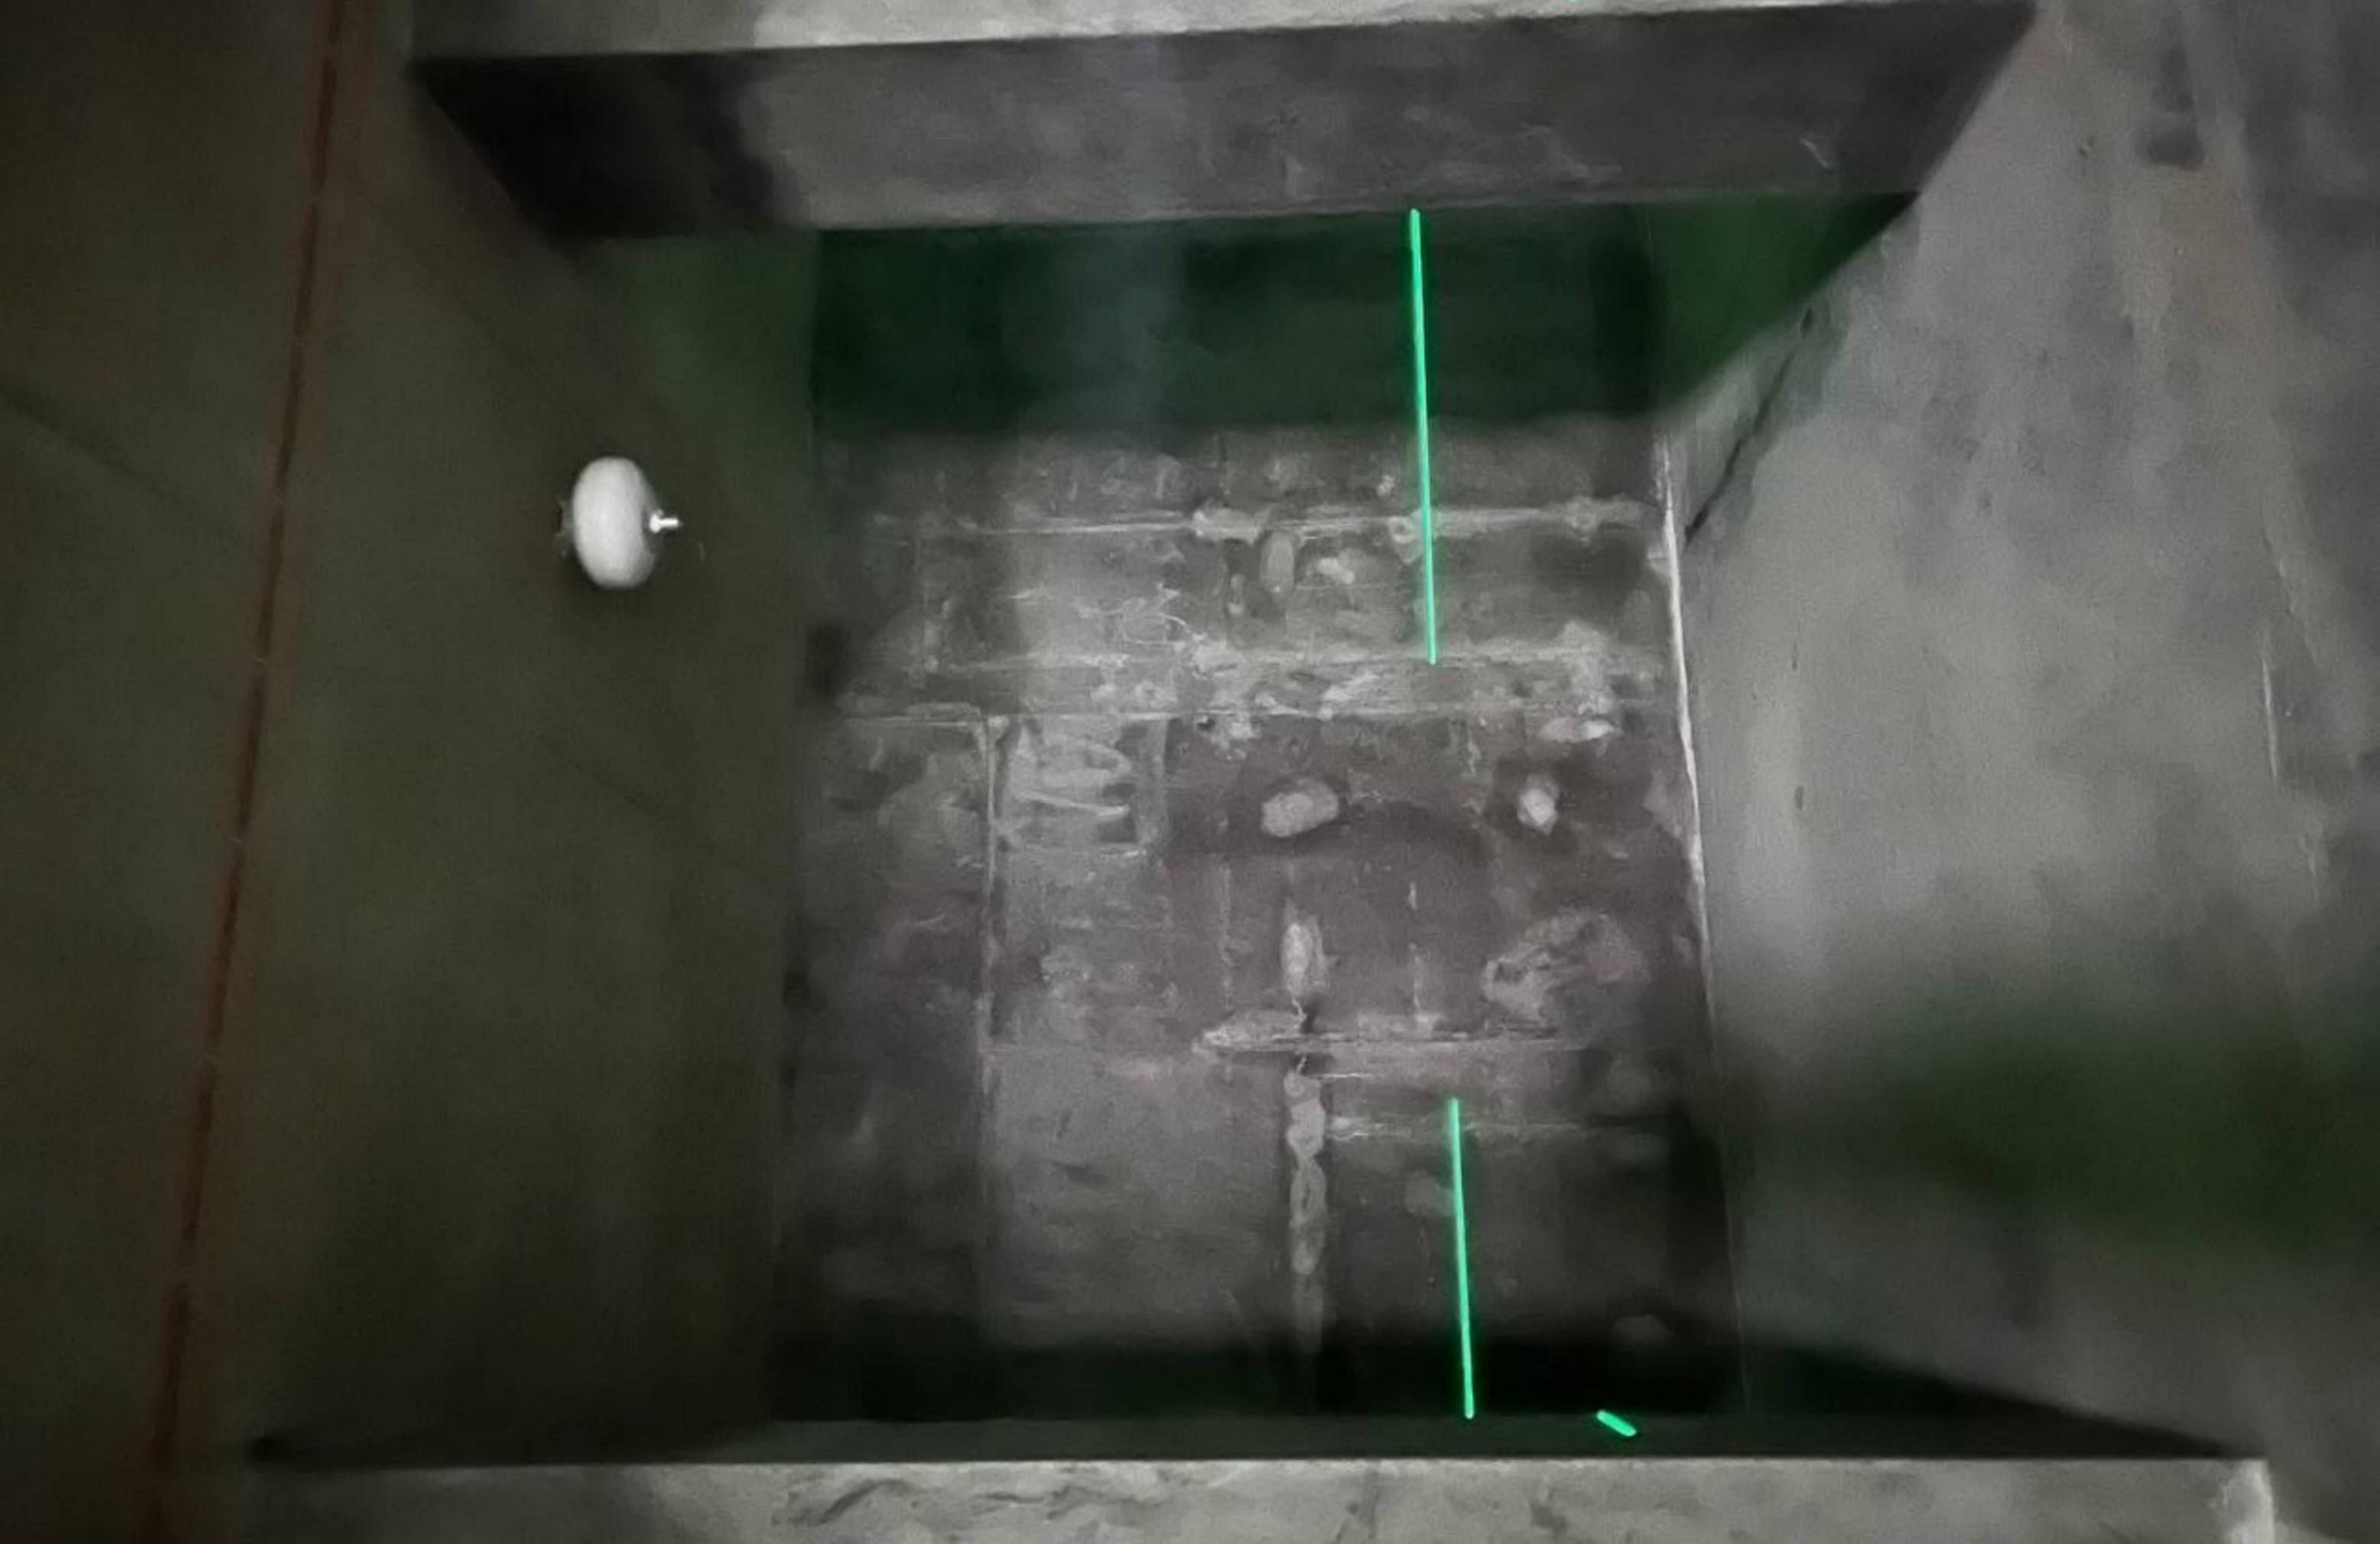












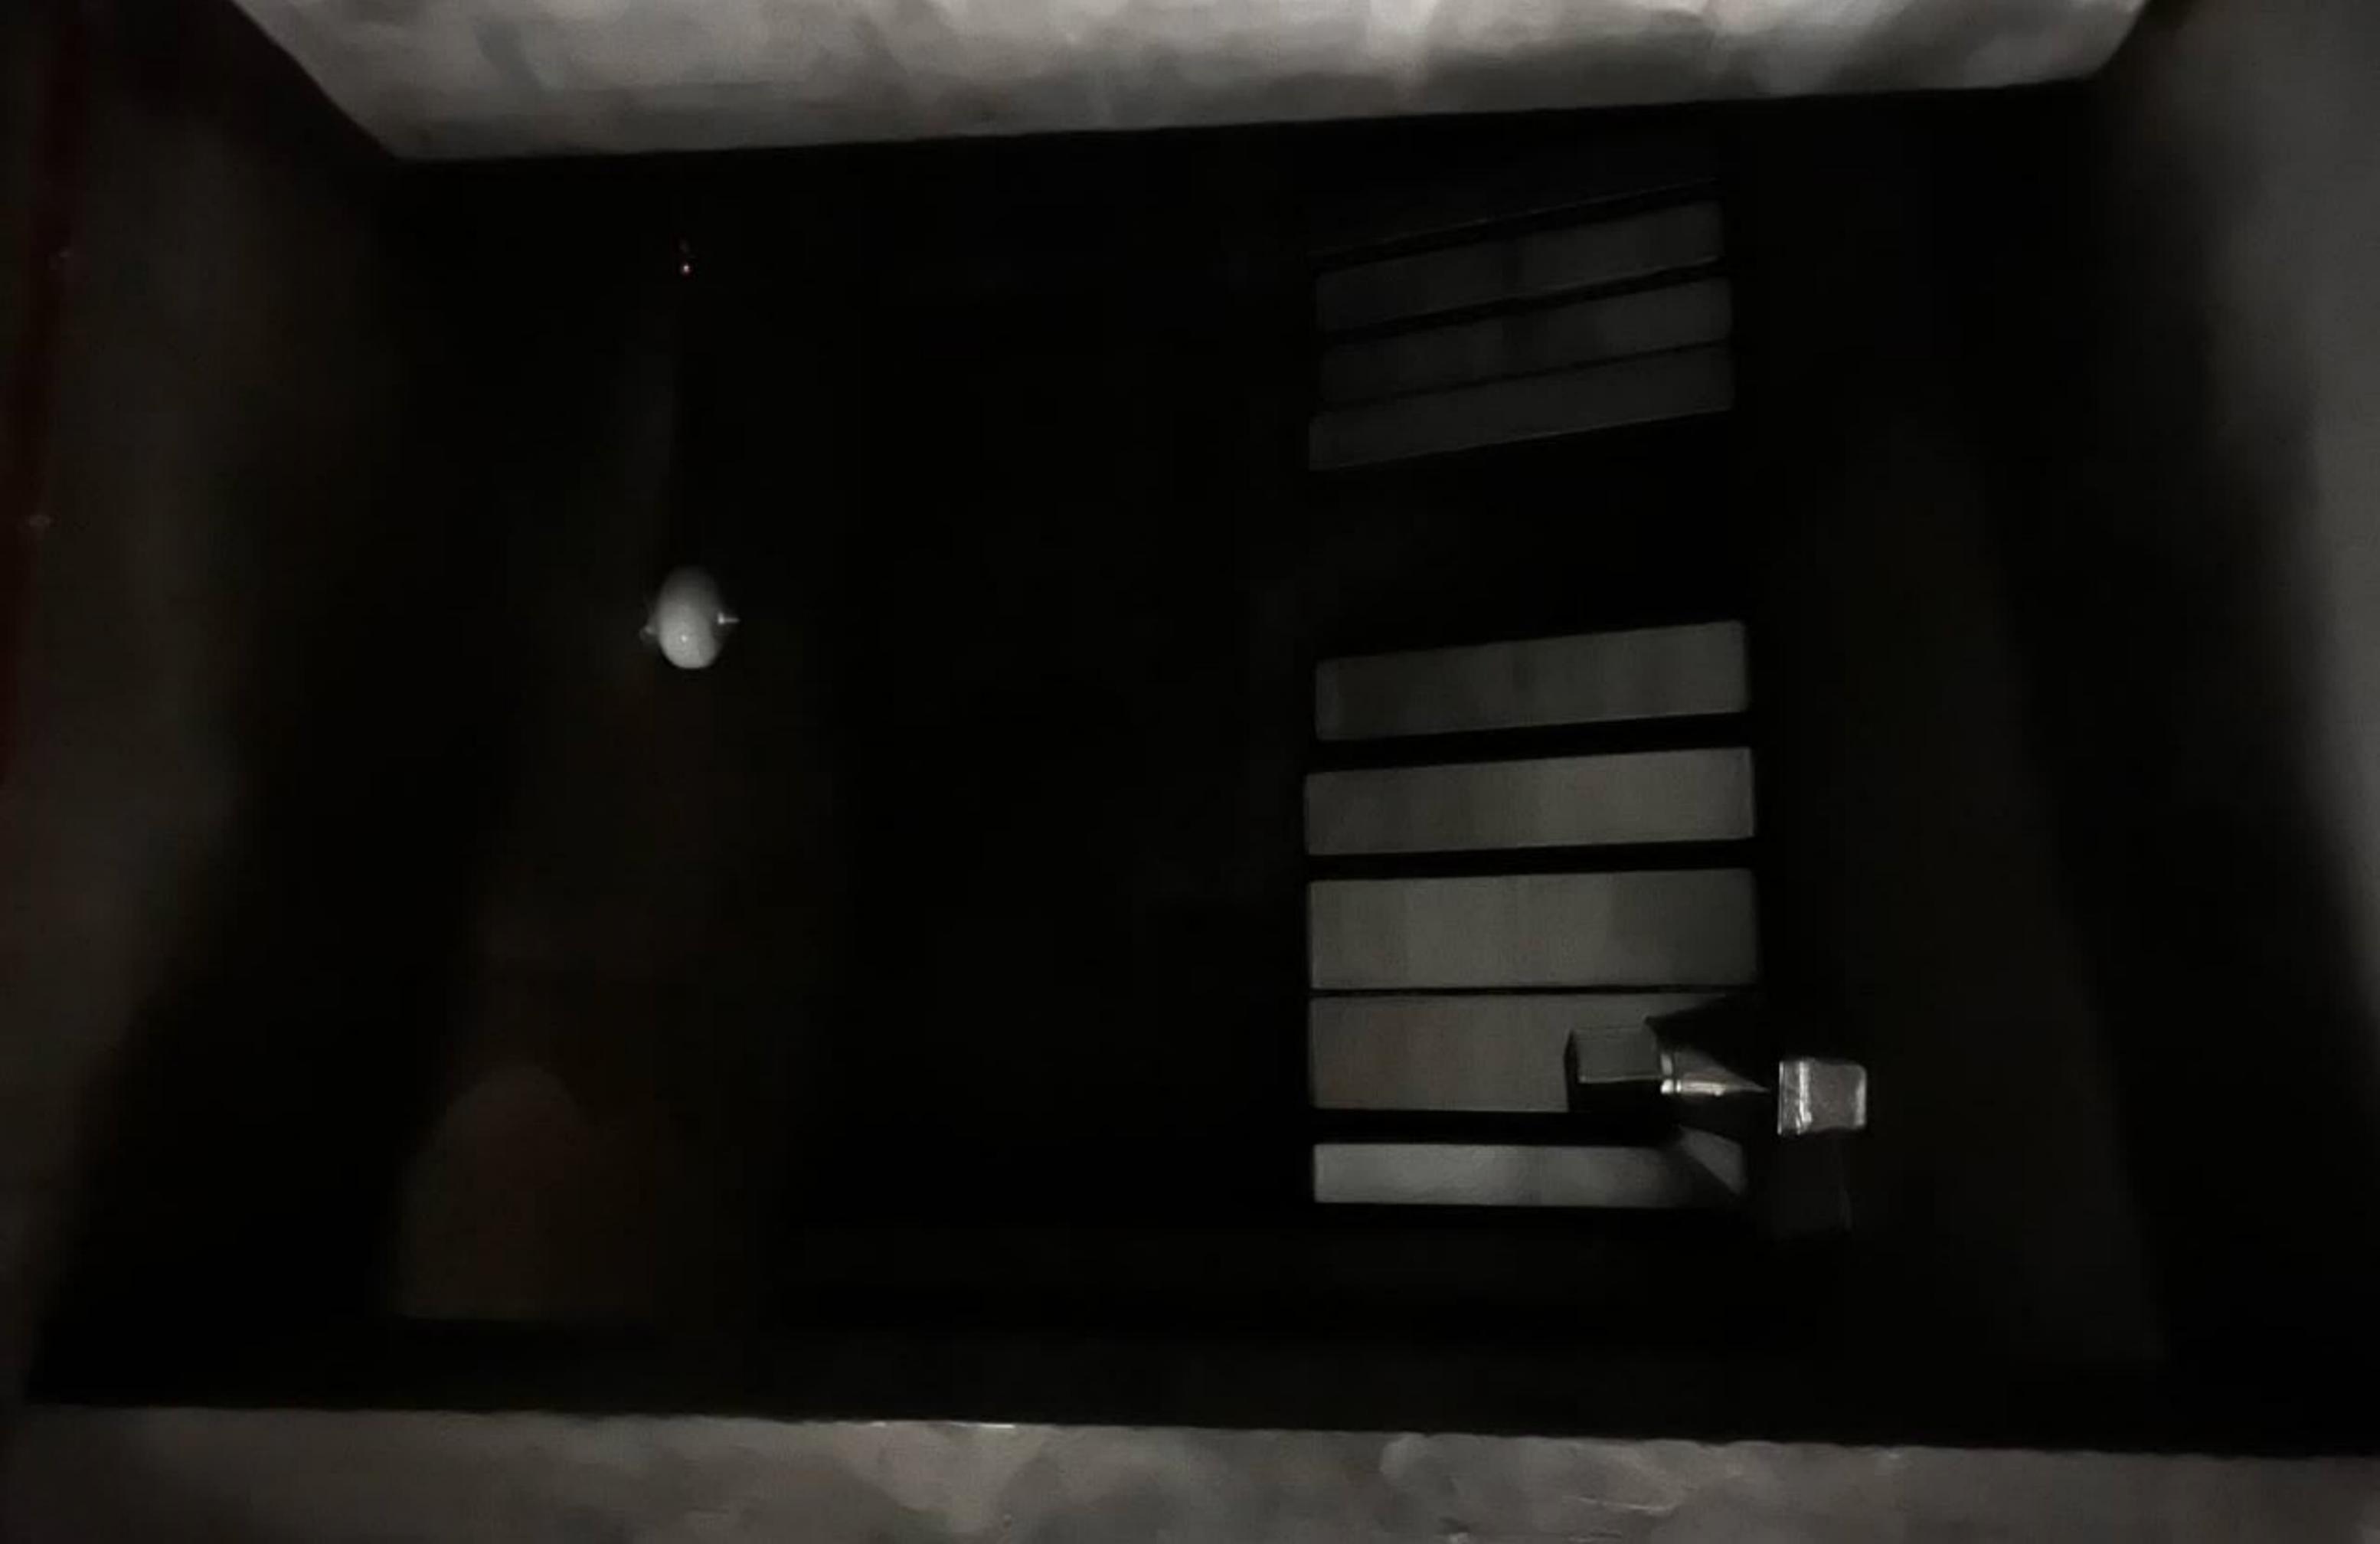














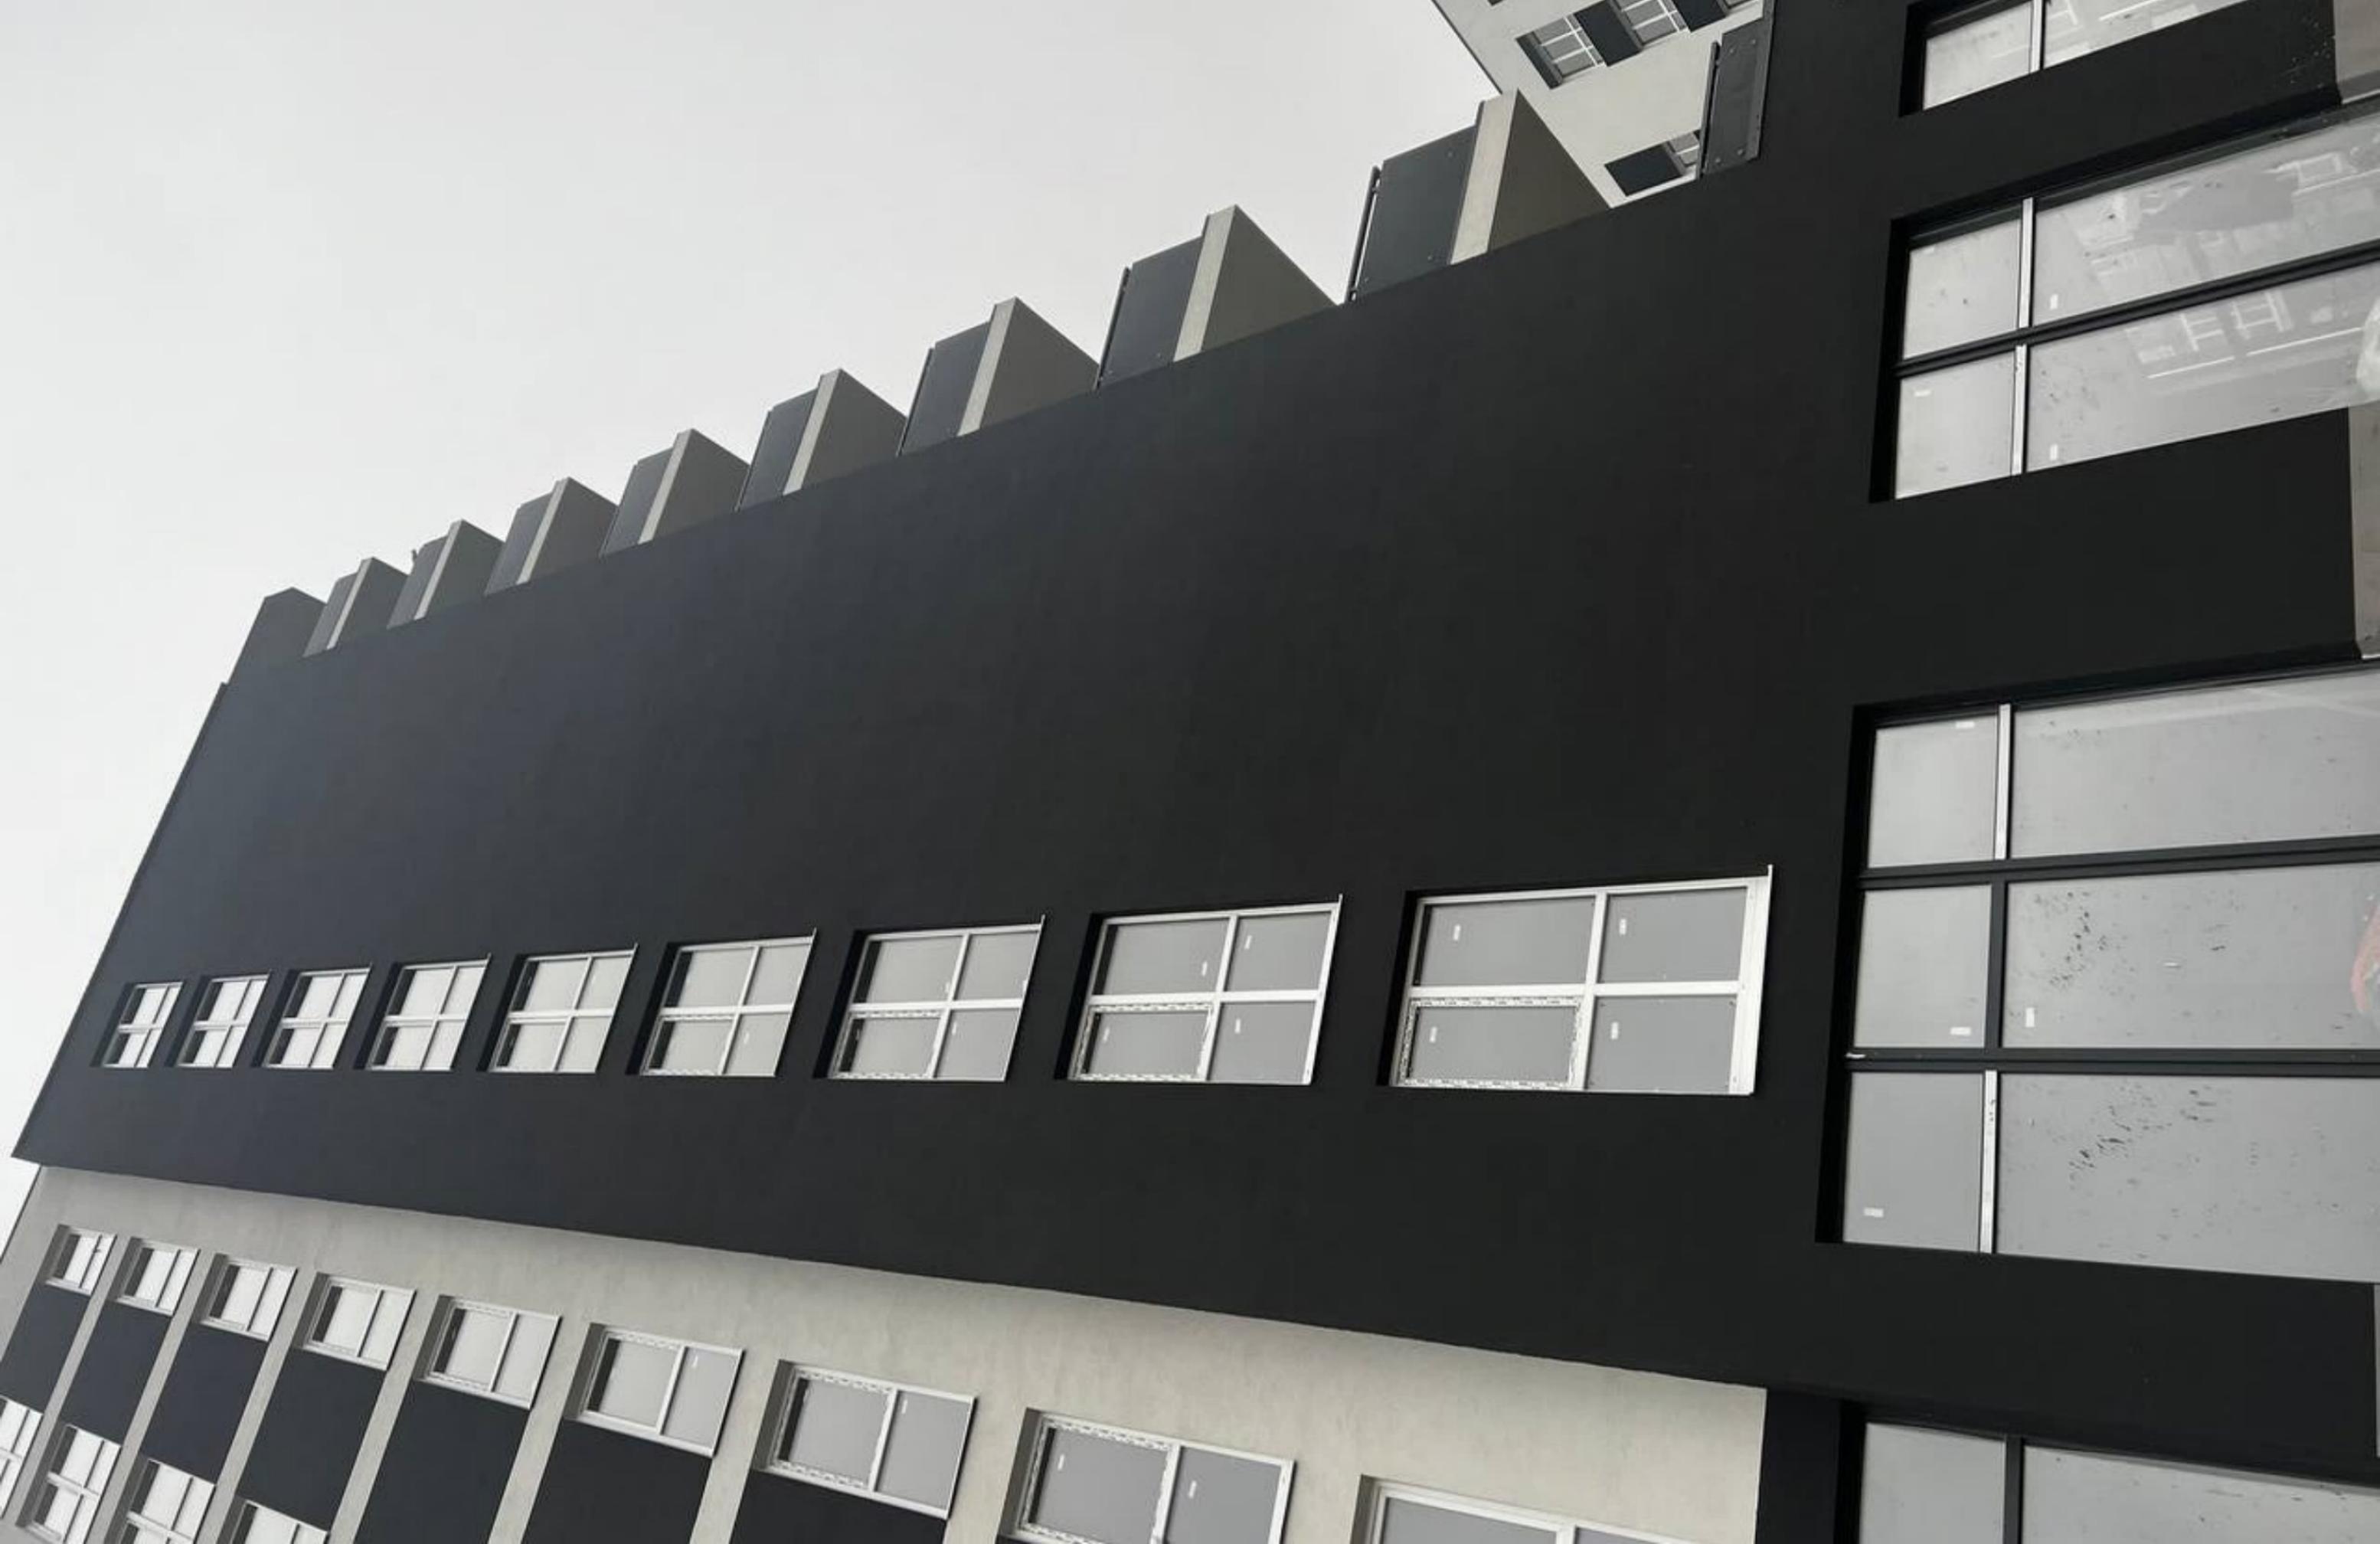














ПОЖНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS
104



ПОЖНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS
104

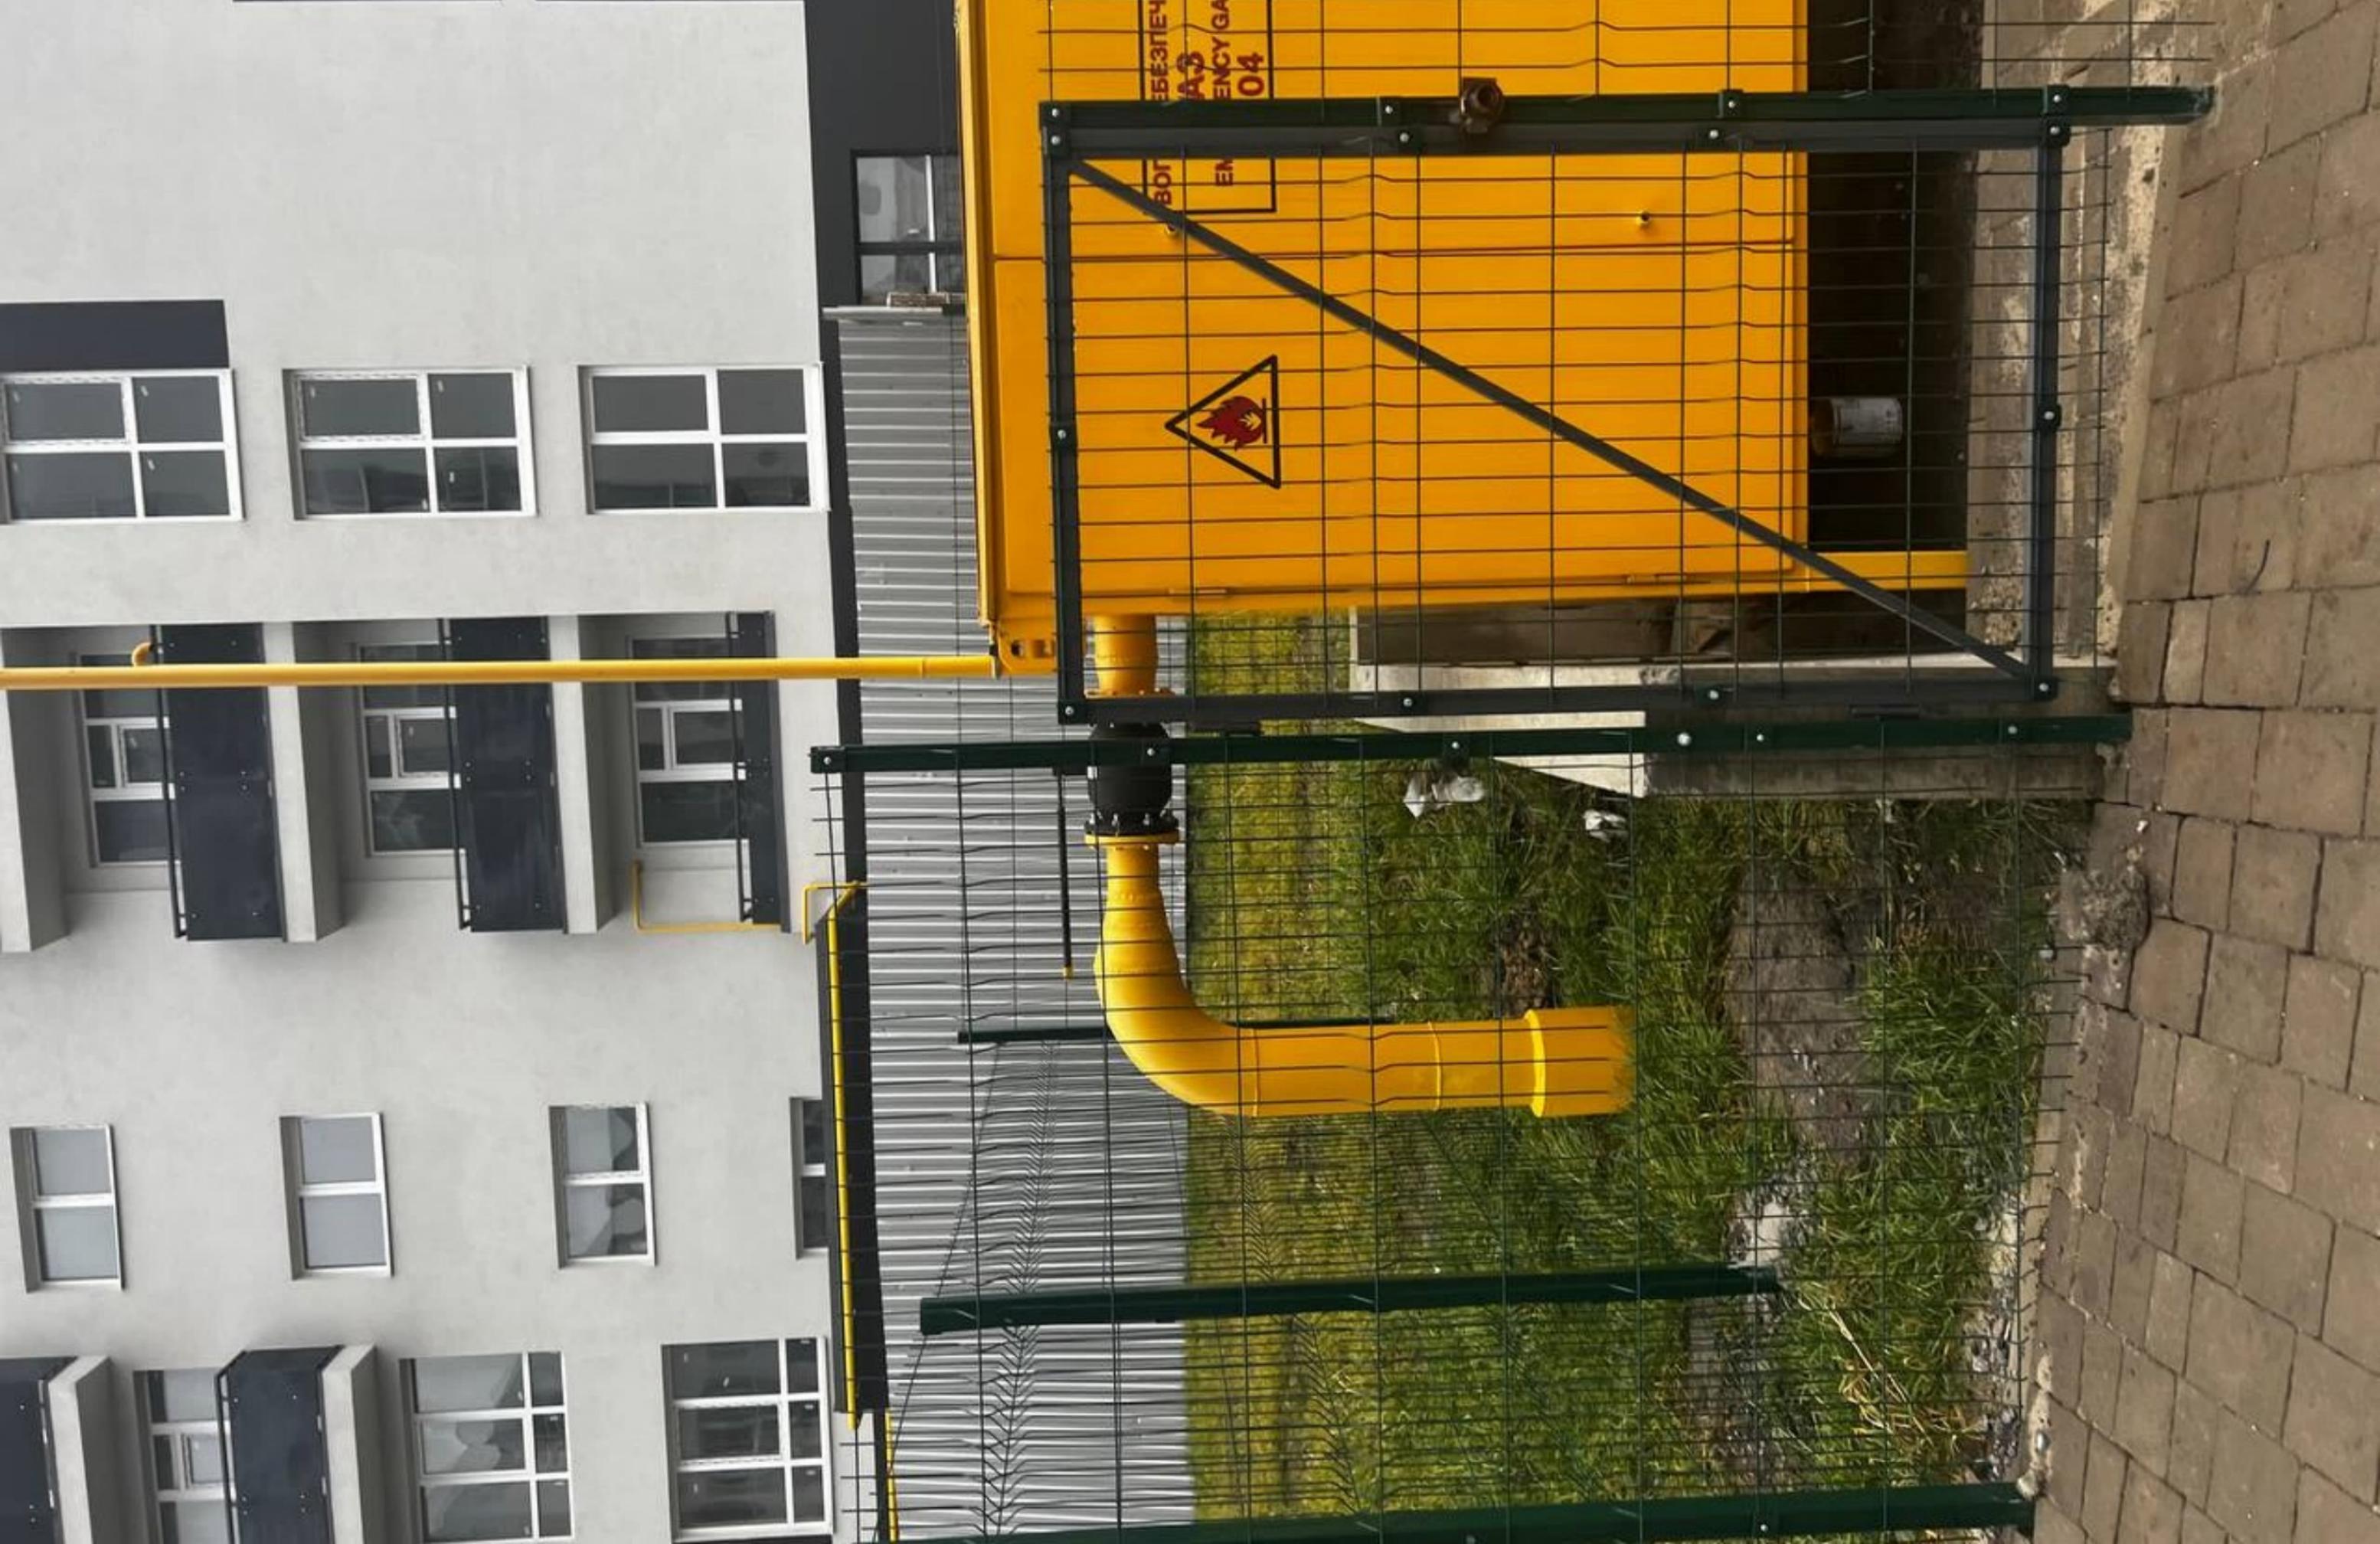



ВОГНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS
104



ВОГНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS
104





























P









ОСТОРОЖНО
ГАЗ
ИЗБЕЖАТЬ ОГНЯ
С 304

ОСТОРОЖНО
ГАЗ
ИЗБЕЖАТЬ ОГНЯ
104

ОСТОРОЖНО
ГАЗ
ИЗБЕЖАТЬ ОГНЯ
104



ВОГНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS
☎104

ВОГНЕБЕЗПЕЧНО
ГАЗ
EMERGENCY GAS





















